



DECOPLAST PRODUCT SUBMITTAL

DDARS CHanneled Adhesive EPS EIFS Exterior Wall Insulation and Finish System
with Moisture Drainage That Incorporates Continuous Insulation (Ci) and an Air/Water
Resistive Secondary Barrier

Date:

Project:

Location:

Architect:

General Contractor:

Applicator:

SYSTEM FEATURE

- Proven moisture drainage performance
- Water-Resistive Barrier that covers the substrate
- Waterproof Flashing material for rough openings
- A drainage plane between the WRB and the insulation board that is achieved with vertical ribbons of adhesive applied over the WRB
- High-Performance Ci exterior insulation expanded polystyrene (EPS) which is secured with an adhesive or mechanically to the substrate
- A water-resistant base coat that is applied on top of the insulation to serve as an additional weather protection
- Glass-fiber reinforcing mesh embedded in the base coat
- A finish coat that typically uses colorfast and crack-resistant acrylic co-polymer technology
- Drainage Weep Track
- Warranty



DECOPLAST SYSTEM OVERVIEW

Decoplast offers a wide variety of EIFS systems that incorporate secondary weather protection and drainable performance features that allow architects and owners to meet today's energy, air, and water resistive barrier requirements.

The DDARS EPS CHanneled Adhesive EIFS Exterior Wall Insulation and Finish System with Moisture Drainage incorporates Continuous Insulation EPS Ci backed with a secondary Air/Water Resistive Barrier and DecoShield flashing that is further enhanced with the use of vertically notched adhesive on the back of the insulation to provide positive moisture drainage channels.

QUALIFICATIONS STATEMENT

Decoplast is pleased to provide the following qualification statement for your review. With industry building science expertise, and provision to offer superior products, warranty protection, service, support, and design guidance, Greenmaker Industries / Decoplast provides a single source for all your EIFS, Stucco, Masonry construction and Coating needs. We offer a full line of professional grade products that meet today's demanding energy, performance, and design requirements. From building envelope design to sustainable maintenance and restoration, Decoplast provides a smarter alternative.

- Over 30 Years manufacturing Architectural coatings and energy efficient wall systems.
- Defective Material and Labor Warranties
- Over 250 million SF of product sold and installed worldwide
- Miami Dade Code Compliant (NOA # 17-1227.12)
- FL Product Approval (FL16250-R2)
- AIA Continuing Education Provider # 40107627
- Texas Department of Insurance EC-79
- ICC ESR- 3428
- NFPA-285 Compliant UL File # R-38721
- NFPA-268 Compliant (SWRI # 21604.01.209)
- ASTM-E119 Compliant (reference UL Labs Project # 4787376813)

MANUFACTURING LOCATIONS

West Hartford, CT – Main Office	Ispica RG, Italy
Mableton, GA	Castelfranco Veneto, Italy

Partial List of Complete Projects and Companies That Have Used Decoplast Wall Systems

HOSPITALITY

- The Wynn Hotel and Casino - Las Vegas, NV (completed in 2007 /250,000 SF)
- Excalibur Hotel and Casino - Las Vegas, NV (completed in 2006)
- Sonesta Hotels and Condos - Sanibel Island, FL
- Hard Rock Hotel and Casino - Fort Lauderdale, FL (completed in 2004)
- Hilton Hotel Properties
 - Home 2 Suites (Gulfport, MS)
 - Home 2 Suites (Pensacola, FL)
 - Hampton Inn (Gulf Shores, AL)
 - Hampton Inn (Milwaukie, WI)
 - Hampton Inn (Gulfport, MS)
 - Hampton Inn (Bartonsville, PA)
 - Hampton Inn (Panama City, FL)
 - TRU Hotel (McDonough, GA)
- Walt Disney World – Orlando, FL (completed in 2001)
- Flamingo Hotel Casino - Las Vegas, NV (completed in 2002)
- Holiday Inn Express
- Hotel RIU Plaza - NY, NY
- Choice Hotels Group
- Marriott Hotel Group
 - Fairfield Inn (Plainville, CT)
 - Fairfield Inn (Brooklyn, NY)
 - Town Place Suites (Shalimar, FL)
 - Fairfield Inn (Atmor, AL)
 - Fairfield Inn (Saraland, AL)

- Fairfield Inn (Meridian, MS)
- Fairfield Inn (Gulfport, MS)

COMMERCIAL / RETAIL / MIXED-USE—RESIDENTIAL / RESTAURANT

- Conde Nast Building - Times Square, NY, NY (completed in 1997)
- Tiffany Company Store - Nationally Specified (85 Locations completed to date)
- Empire State Building (completed in 1984)
- Arizona Beverage Company Headquarters (completed in 2000)
- CVS Pharmacy - Nationally Specified (Over 250 stores completed to date)
- Old Navy
- Wendy's
- Anthropology Stores (Nationally Specified)
- Pottery Barn Stores (Nationally Specified)
- Altar'd State Retail Stores (Nationally Specified)
- McDonald's (Over 200 stores completed to date)
- Burger King (Over 125 stores completed to date)
- LA Fitness
- Dunkin Donuts
- Dunkin Donuts Stadium Hartford CT
- Shops @ Corpus - Corpus Christie, Texas
- Taco Bell
- O'Reilly Auto Parts
- Advance Auto Parts
- Auto Zone
- TJ Maxx
- Verizon Wireless
- Publix
- Petco
- Village at Yarrow Bay, Washington State (500,000 SF)

GOVERNMENTAL / CIVIC / EDUCATIONAL

- Naval Air Station Patuxent River, MD
- UNLV Library and Dorms – Las Vegas, NV (completed in 1998)
- Yankee Stadium (completed in 2008)
- City Field (completed in 2008)
- CIA Building – Langley, VA (completed in 2005)
- American Consulate – Rome, Italy (completed 1985)
- Yale University - New Haven, CT (completed in 1995)
- MOMA Museum of Modern Art (1992 and expansion in 2003)
- Arthur Ash Tennis Stadium -Flushing Meadows, NY

SYSTEM COMPONENTS

1. Decoplast Liquid Water-Resistive Membrane and Air Barrier (available in Texture, Smooth or)
2. DecoShield Flashing Tape
3. Decoshield Sheathing Fabric
4. Drainage Track
5. Decoplast Adhesive in vertical notched trowel configuration
6. EPS Insulation Boards, creating a layer of continuous insulation Ci.
7. Decoplast Fiberglass Reinforced Base Coat
8. Decoplast Primer (optional)
9. Decoplast Finish



CSI SECTION 07 24 00 – Insulation & Finish System (EIFS) - Class PB 07 25 19- Water-Drainage Exterior Insulation and Finish System

INTRODUCTION

This document contains the Manufacturer's Standard Specification for the DECOPLAST DDARS EPS CHanneled Adhesive Ci Water Drainage Class PB EIFS System. These specifications follow the Construction Specification Institute's MasterFormat.

ITS IMPORTANT TO TAILOR THE DECOPLAST SPECIFICATIONS TO YOUR SPECIFIC PROJECT NEEDS

These specifications cover all the common ways of using the DECOPLAST DDARS EPS CHanneled Adhesive Ci System. Most projects use varying combinations of materials and methods. Tailor the specifications to your project by using only those sections which apply. Also, it may be prudent to place certain parts of the DECOPLAST Specification in other parts of the project's total specification, such as sealants and framing. The project design professional is responsible for ensuring that the project specifications are suitable for the project. For assistance in preparing your specification, contact DECOPLAST Technical Support.

WARNING

The DECOPLAST DDARS System is designed as a secondary weather barrier drainage wall system and is detailed to discharge incidental moisture from within the System. Specifications should be followed, and proper details adhered to prevent water intrusion and possible damage to the System or other building elements. Care should be taken to ensure that all building envelope elements, including without limitation, roof designs, windows, flashings, sealants, etc., are integrated with this system and are designed to work together.

SYSTEM OVERVIEW

The DDARS NOTCHED EIFS Exterior Wall Insulation and Finish System with Moisture Drainage incorporates Continuous Insulation Ci backed with a secondary Air/Water Resistive Barrier and DecoShield flashing that is further enhanced with the use of vertical notched adhesive channels on the back of the insulation to provide positive moisture drainage.

Decoplast DECOPLAST DDARS EPS CHanneled Adhesive Ci is qualified for use in combustible and noncombustible construction, fire resistant rated walls and residential and non-residential construction.

Sheathing is limited to glass mat gypsum sheathing, cement board, and CDX plywood. Plywood may require 2 coats of Decoplast Liquid Weather Resistive Barrier either Spray or Roll-on or Decoplast Speedcoat Moisture Barrier and Adhesive (Trowel Applied).



The system is qualified for application to certain types of OSB (oriented strand board). OSB may require 2 coats of Liquid Weather Resistive Barrier either Spray or Roll-on or Speedcoat Moisture Barrier and Adhesive (trowel applied).

- Some jurisdictions may require special inspections of the Liquid Weather Barrier application.
- Substrate construction must resist all design loads. Sheathing attachment to framing must resist design negative wind loads because it transfers those loads to the framing. Appropriate safety factors must be applied.
- All penetrations and non-draining terminations of the system must be made weather-tight, typically by sealants and/or flashings.
- The EPS in EIFS has a maximum service temperature of 165° F (74° C). Dark colors will increase the surface temperature of the EIFS wall.

PART 1 - GENERAL

3.1 SECTION INCLUDES

A. Manufacturer's requirements for the proper design, use, and installation of an Exterior Insulation and Finish System.

3.2 RELATED SECTIONS

- A. Unit Masonry – Section 04 20 00
- B. Concrete – Sections 03 00 00
- C. Cast in Place Concrete – Section 03 30 00
- D. Cold-Formed Metal Framing – Section 05 40 00
- E. Sheet Metal Flashing and Trim – Section 07 62 00
- F. Wood Framing – Section 06 11 00
- G. Joint Protection – Section 07 90 00
- H. Flashing – Section 07 60 00
- I. Water-Resistive Barriers – Section 07 25 00
- J. Vapor Retarders – Section 07 26 13
- K. Vapor Retarders – Section 07 26 13
- L. Air Barriers – Section 07 27 26

3.3 REFERENCES

- | | |
|---------------|--|
| A. ASTM B117 | Test Method for Salt Spray (Fog) Testing |
| B. ASTM C203 | Standard Test Method for Breaking Load and Flexural Properties of Block-Type Thermal Insulation |
| C. ASTM C1135 | Test Method for Determining Tensile Adhesion Properties of Structural Sealants |
| D. ASTM D968 | Standard Test Methods for Abrasion Resistance of Organic Coatings by Falling Abrasive |
| E. ASTM D1037 | Standard Test Methods for Evaluating Properties of Wood-Base Fiber and Particle Panel Materials |
| F. ASTM D2247 | Practice for Testing Water Resistance of Coatings in 100 Percent Relative Humidity |
| G. ASTM D2294 | Standard Test Method for Creep Properties of Adhesives in Shear by Tension Loading (Metal-to-Metal). |
| H. ASTM D2794 | Standard Test Method for Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact) |
| I. ASTM D3273 | Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber |
| J. ASTM E84 | Test Method for Surface Burning Characteristics of Building Materials. |
| K. ASTM E108 | Standard Test Methods for Fire Tests of Roof Coverings |
| L. ASTM E119 | Standard Test Method for Fire Tests of Building Construction and Materials. |
| M. ASTM E283 | Standard Test Method for Determining rate of Air Leakage Through Exterior Windows, Curtains Walls, and Doors Under Specified Pressure Difference Across the Specimen |
| N. ASTM E330 | Test Method for Structural Performance by Uniform Static Air Pressure Difference. |
| O. ASTM E331 | Test Method for Water Penetration by Uniform Static Air Pressure Difference. |
| P. ASTM E695 | Method for Measuring Relative Resistance to Impact Loading. |
| Q. ASTM E2134 | Standard Test Method for Evaluating the Tensile-Adhesion Performance of an Exterior Insulation and Finish System (EIFS) |
| R. ASTM E2178 | Standard Test Method for Air Permeance of Building Materials |
| S. ASTM E2273 | Standard Test Method for Determining the Drainage Efficiency of Exterior Insulation and Finish Systems (EIFS) Clad Wall Assemblies |
| T. ASTM E2430 | Standard Specification for Expanded Polystyrene ("EPS") Thermal Insulation Boards For Use In Exterior Insulation and Finish Systems ("EIFS") |

- U. ASTM E2485 Standard Test Method for Freeze/Thaw Resistance of Exterior Insulation and Finish Systems (EIFS) and Water Resistive Barrier Coatings
- V. ASTM E2486 Standard Test Method for Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS)
- W. ASTM G155/ G153 Accelerated Weathering for Exposure of Nonmetallic Materials.

3.4 ASSEMBLY DESCRIPTION

- A. General: The DECOPLAST DDRS is an Exterior Insulation and Finish System (EIFS), Class PB, consisting of an air/water-resistive barrier, an adhesive, expanded polystyrene insulation board, base coat, reinforcing mesh(es) and finish.
- B. Design Requirements:
 - 1. Acceptable substrates for the DECOPLAST DDRS System shall be:
 - (i) Exterior grade gypsum sheathing meeting ASTM C 1396 (formerly C 79) requirements for water resistant core or Type X core.
 - (ii) Exterior sheathing having a water-resistant core with fiberglass mat facers meeting ASTM C 1177.
 - (iii) Exterior fiber reinforced cement or calcium silicate boards.
 - (iv) APA Exterior or Exposure 1 Rated Plywood, Grade C-D or better, nominal 1/2 in (12.7 mm), minimum, installed with the C face out.
 - (v) APA Exterior or Exposure 1 Fire Retardant Treated (FRT) Plywood, Grade C-D or better, nominal 1/2 in (12.7 mm), minimum, installed with the C face out.
 - (vi) APA Exposure 1 Rated Oriented Strand Board (OSB) nominal 1/2 in (12.7 mm), minimum. **NOTE: Applications over OSB sheathing requires a minimum of 2 coats of DECOPLAST – Smooth Liquid Weather Barrier. Liquid Weather Barrier Texture is not recommended for the field of wall applications over OSB.**
 - (vii) Unglazed brick, cement plaster, concrete, or masonry.
 - 2. Deflection of the substrate systems shall not exceed 1/240 times the span.
 - 3. The substrate shall be flat within 1/4 in (6.4 mm) in a 4 ft (1.2 m) radius.
 - 4. The slope of inclined surfaces shall not be less than 6:12 (27°) and the length shall not exceed 12 in. Usage not meeting above criteria shall be approved in writing prior to installation.
 - 5. All areas requiring an impact resistance classification higher than "standard", as defined by ASTM E 2486 (formerly EIMA Standard 101.86), shall be as detailed in the drawings, and described in the contract documents.
 - 6. Expansion Joints: Design and location of expansion joints in the System is the responsibility of the project designer and shall be noted on the project drawings. As a minimum, expansion joints shall be placed at the following locations:
 - a. Where expansion joints occur in the substrate system
 - b. Where building expansion joints occur
 - c. At floor lines in wood frame construction
 - d. At floor lines of non-wood framed buildings where significant movement is expected

- e. Where the System abuts dissimilar materials
- f. Where the substrate type changes
- g. Where prefabricated panels abut one another
- h. In continuous elevations at intervals not exceeding 75 ft (23 m)
- i. Where significant structural movement occurs, such as changes in roof line, building shape or structural system

7. Terminations:

- a. Prior to applying the DECOPLAST DDARS System, wall openings shall be treated with DECOSHIELD Flashing Tape.
- b. The System shall be held back from adjoining materials around openings and penetrations such as windows, doors, and mechanical equipment a minimum of 3/4 in (19 mm) for sealant application.
- c. The system shall be terminated a minimum of 8 in (203 mm) above finished grade.
- d. Sealants
 - 1) Shall be manufactured and supplied by others.
 - 2) Shall be compatible with the DECOPLAST System materials.
 - 3) The sealant backer rod shall be closed cell.
- 8. Vapor Retarders: The use and location of vapor retarders within a wall assembly is the responsibility of the project designer and shall comply with local building code requirements. The type and location shall be noted on the project drawings and specifications. Vapor retarders may be inappropriate in certain climates and can result in condensation within the wall assembly.
- 9. Dark Colors: The use of dark colors must be considered in relation to wall surface temperature as a function of local climatic conditions. Use of dark colors in high temperature climates can affect the performance of the system.
- 10. Flashing: Shall be provided at all roof-wall intersections, windows, doors, chimneys, decks, balconies, and other areas as necessary to prevent water from entering behind the System.
- 11. Functional Criteria:
 - A. General:
 - a. Insulation Board: At system termination, completely encapsulate insulation board edges by mesh reinforced base coat, substrate, or drainage track (limited to terminations at foundation). The use of and maximum thickness of insulation board shall be in accordance with applicable building codes and EIFS manufacturer's requirements.
 - b. Flashing: Flashing shall be continuous and watertight. Flashing shall be designed and installed to prevent water infiltration behind the cladding. Refer to Division 07 Flashing Section for specified flashing materials.
 - c. The configuration of the water resistive barrier, drainage plane and flashing and Decoplast materials, must allow for the egress of incidental moisture.
 - d. See Current ICC Evaluation Service Report or Contact Decoplast Technical Department for Design Windloads.

- (a) Performance Requirements: System to meet the performance and testing requirements of the International Code Council Acceptance Criteria AC 212

e. Substrate Systems:

- (a) Shall be engineered to withstand applicable design loads including required safety factor.
- (b) Maximum deflection of substrate system under positive or negative design loads shall not exceed $L/240$ of span.
- (c) Substrate dimensional tolerance: Flat within $1/4$ in (6.4 mm) in any 4 ft (122 cm) radius.
- (d) Surface irregularities: Sheathing not over $1/8$ in (3 mm); masonry not over $3/16$ in (4.8 mm).

EDITOR NOTE: COORDINATE BELOW IMPACT RESISTANCE CLASSIFICATION REQUIREMENTS ACCORDING TO ASTM E2486 - STANDARD TEST METHOD FOR IMPACT RESISTANCE OF CLASS PB EXTERIOR INSULATION AND FINISH SYSTEMS (EIFS)

7. Impact Resistance Classification:

- a. Standard Impact Resistance, 25-49 in-lbs. (2.8 – 5.6 J) Impact Range
- b. Medium Impact Resistance, 50-89 in-lbs. (5.7–10.1 J) Impact Range
- c. High Impact Resistance, 90-150 in-lbs. (10.2–17.0 J) Impact Range
- d. Ultra-High Impact Resistance, >150 in-lbs. (> 17.0 J) Impact Range

EDITOR NOTE: INDICATE JOINT WIDTH ON DRAWINGS FOR MOVEMENT AND EXPANSION AND CONTRACTION CONDITIONS. CONSULT WITH SEALANT MANUFACTURER FOR JOINT DESIGN RECOMMENDATIONS AND WITH EIFS MANUFACTURER FOR COORDINATION OF EIFS MATERIALS.

8. Substrate movement and expansion and contraction of EIFS and adjacent materials shall be taken into account in design of expansion joints, with proper consideration given to sealant properties, installation conditions, temperature range, coefficients of expansion of materials, joint width to depth ratios, and other material factors. Minimum width of expansion joints shall be as follows:

- (a) $1/2$ in (12.7 mm) where EIFS abuts other materials.
- (b) $3/4$ in (19 mm) for thru wall expansion relief.
- (c) Larger width where indicated on drawings.

9. Manufacturer's Detail:

- a. EIFS latest published information shall be followed for standard detailing.
- b. Non-standard detailing shall be as recommended by manufacturer, approved by Project Designer and be part of the Contract Documents.

10. Building Code Conformance: EIFS shall be acceptable for use on this project under building code having jurisdiction.

3.5 SUBMITTALS

- A. General: Submit Samples, Evaluation Reports, warranties, and Certificates in accordance with Division 01 General Requirements Submittal Section.
- B. Product Data: The contractor shall submit to the owner/architect the manufacturer's product data sheets describing products, which will be used on this project.

3.6 QUALITY ASSURANCE

A. Qualifications:

1. All EIFS assembly materials must be manufactured or sold by a single-source manufacturer and must be purchased direct from the manufacturer or its authorized distributor.
2. Contractor: Shall be knowledgeable in the proper installation of the System and shall be experienced and competent in the installation of Exterior Insulation and Finish Systems. Additionally, the contractor shall possess a current Trained Contractor Certificate issued by Decoplast.

B. Regulatory Requirements:

1. Insulation Board: Shall be produced and labeled under a third-party quality program as required by applicable building code.
2. The EPS shall be separated from the interior of the building by a minimum 15-minute thermal barrier.

3.7 DELIVERY, STORAGE, AND HANDLING

- A. Delivery: Deliver materials in original packaging with manufacturer's identification.
- B. Storage: Store materials in a cool, dry location, out of sunlight, protected from weather and other harmful environment, and at a temperature above 40°F (4°C) and below 110°F (43°C) in accordance with manufacturer's instructions.

3.8 PROJECT / SITE CONDITIONS

- A. Installation Ambient Air Temperature: Minimum of 40°F (4°C) and rising and remain so for 24 hours thereafter.
- B. Substrate Temperature: Do not apply materials to substrates whose temperature are below 40°F (4°C) or contain frost or ice.
- C. Inclement Weather: Do not apply materials during inclement weather unless appropriate protection is employed.
- D. Sunlight Exposure: Avoid, when possible, installation of the materials in direct sunlight. Application of Acrylic Finishes in direct sunlight in hot weather may adversely affect aesthetics.
- E. Materials shall not be applied if ambient temperature exceeds 120°F (49°C) or falls below 40°F (4°C) within 24 hours of application. Protect materials from uneven and excessive evaporation during hot, dry weather.
- F. Prior to installation, the substrate shall be inspected for surface contamination, or other defects that may

adversely affect the performance of the materials and shall be free of residual moisture.

G. Existing Conditions: The contractor shall have access to electric power, clean potable water, and a clean work area at the location where the Decoplast materials are to be applied.

3.9 COORDINATION AND SCHEDULING:

A. Coordination: Coordinate water-resistive membrane & air barrier coating materials installation with other construction operations.

3.10 WARRANTY

A. Warranty: Upon request, at completion of installation, provide manufacturer's Standard Limited Warranty.

B. Manufacturer shall provide a written moisture drainage and limited materials warranty against defective material upon written request. Greenmaker Industries LLC of CT shall make no other warranties, expressed or implied. Greenmaker Industries does not warrant workmanship.

C. The applicator shall warrant workmanship separately. Greenmaker Industries shall not be responsible for workmanship associated with installation of the System.

1.11 DESIGN RESPONSIBILITY

A. It is the responsibility of both the specifier and the purchaser to determine if a product is suitable for its intended use. The designer selected by the purchaser shall be responsible for all decisions pertaining to design, detail, structural capability, attachment details, shop drawings and the like. Greenmaker Industries LLC has prepared guidelines in the form of specifications, installation details, and product data sheets to facilitate the design process only. Greenmaker Industries is not liable for any errors or omissions in design, detail, structural capability, attachment details, shop drawings, or the like, whether based upon the information prepared by Greenmaker Industries or otherwise, or for any changes which purchasers, specifiers, designers, or their appointed representatives may make to Decoplast published details or comments.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturer, Basis of Design: DECOPLAST, 697 Oakwood Ave. West Hartford, CT 06110 Contact: Architectural Sales or Technical Support (860.761.2830).

B. Components: Obtain components from authorized distributors. No substitutions or additions of other materials are permitted without prior written permission from the EIFS manufacturer for this project.

2.2 MATERIALS

A. Portland Cement: Shall be Type I or II, meeting ASTM C 150, white or gray in color, fresh and free of lumps.

B. Water: Shall be potable clean and free of foreign matter.

2.3 COMPONENTS

A. Secondary Air/Water-Resistive Barrier Components:

- [1. Decoplast Liquid Weather Resistive Barrier: A vapor permeable, flexible, polymer-based water resistive and air barrier available in Smooth or Texture.
- [2. Speedcoat Moisture Barrier and Adhesive (trowel applied): A vapor permeable polymer-based trowel grade water resistive barrier offering a unique dual purpose all in one flexible moisture barrier membrane and adhesive.
- [3. Decoplast Sheathing Fabric: Non-woven synthetic fiber tape to reinforce Liquid Weather Barrier water-resistive barrier at sheathing board joints, into rough openings and other terminations into dissimilar materials available in 4 in, 6 in and 9 in.
- [4. Decoplast DecoShield Flashing Tape: Self-sealing, Polyester faced, rubberized asphalt membrane, 30 mils (0.76 mm) thick.

B. Drainage Track: UV treated PVC "J" channel perforated with weep holes, complying with ASTM D 1784 and ASTM C 1063. **Drainage track usage is limited to the base of the system at finished grade level when installing system in noncombustible construction.** Shall be one of the following:

1. Starter Trac STWP – without drip edge by Plastic Components, Inc.
2. Starter Trac STDE – with drip edge by Plastic Components, Inc.
3. Universal Starter Track by Wind-lock Corporation
4. Sloped Starter Strip with Drip by Vinyl Corp.

C. Adhesives

- [1. Decoplast Liquid Base Coat & Adhesive: 100% acrylic polymer based, requiring the addition of Portland cement; used as an adhesive to laminate EPS Insulation Board to the Weather Resistive Barrier.
- [2. Decoplast Dry Base Coat & Adhesive: Copolymer based, factory blend of cement and proprietary ingredients; requiring the addition of water only, used as an adhesive to laminate EPS Insulation Board to the Weather Resistive Barrier.
- [3. Decoplast Speedcoat Moisture Barrier and Adhesive: Trowel applied Moisture Barrier and Adhesive trowel applied

D. Insulation Board: In compliance with manufacturer's requirements for Standard System EIFS.

- [1. Produced and labeled under a third-party quality program as required by applicable building code; and produced by a manufacturer approved by Decoplast.
- [2. Shall conform to ASTM C578 and ASTM E2430, Type I for Molded Expanded Polystyrene Insulation board.
- [3. Maximum size shall be 2 ft x 4 ft (610 mm x 1219 mm).
- [4. Thickness: $\frac{3}{4}$ in, minimum (19 mm) after rasping.

E. Base Coats:

- [1. Decoplast Liquid Base Coat: 100% acrylic polymer base, requiring the addition of Portland cement.
- [2. Decoplast Premium Dry Base Coat: Copolymer based, factory blend of cement and proprietary ingredients requiring addition of water.
- [3. Decoplast Liquid Hi Build: High Impact basecoat & adhesive. Copolymer based, blend of cement and proprietary ingredients, requires the addition of water and Portland cement.

EDITOR NOTE: RETAIN BELOW STANDARD MESH FOR STANDARD SYSTEM FOR STANDARD IMPACT RESISTANCE CLASSIFICATION.

F. Reinforcing Mesh:

- [1. Standard Mesh: Weight 4.5 oz. per sq. yd. (153 g/sq m); coated for protection against alkali. Standard reinforcement of Decoplast EIFS, or for use with High Impact Armor 15 Mesh, or Ultra High Impact Armor 20 Mesh.
- [2. Short Detail Mesh: Reinforcing mesh used for back wrapping and details.
- [3. Self-Adhesive Detail Mesh: Reinforcing mesh used for complex details.

EDITOR NOTE: RETAIN BELOW MESH REQUIREMENTS AFTER DETERMINATION OF IMPACT RESISTANCE CLASSIFICATION.

- [4. Intermediate Impact 10 Mesh: Weight 12 oz per sq. yd. (407 g/sq m) Reinforcing mesh used with a Standard System, to achieve ASTM E2486 intermediate impact strength.
- [5. High Impact Armor 15 Mesh: Weight 15 oz. per sq. yd. (509 g/sq m) Reinforcing mesh used with a Standard System; to achieve ASTM E2486 high impact strength.
- [6. Ultra-High Impact Armor 20 Mesh: Weight 20 oz. per sq. yd. (678 g/sq m) Reinforcing mesh used with a Standard System; to achieve ultra-high impact strength.
- [7. Corner Mesh: Reinforcing mesh used as corner reinforcement; required when using Ultra-High Impact 20 Mesh.

EDITOR NOTE: RETAIN BELOW AND SPECIFY LOCATIONS TO RECEIVE EIFS WITH HIGHER THAN STANDARD IMPACT RESISTANCE CLASSIFICATION.

Locations: _____; ASTM E2486 Impact Classification: _____

G. Primer:

- [1. Decoplast Primer: 100% acrylic based coating to prepare surfaces for acrylic or elastomeric finishes.

EDITOR NOTE: MODIFY BELOW TO SUIT REQUIREMENTS. CHOOSE ONE FINISH TYPE, TEXTURE, & COLOR

H. Finish:

- [1. Decoplast DPR Standard Acrylic Finish: Factory blended, 100% acrylic polymer-based finish, integrally colored. Finish type, texture and color as selected by Project Designer
- [2. Decoplast Decolastic Elastomeric Finish: Factory blended, 100% acrylic polymer based elastomeric textured finish, integrally colored. Finish type, texture and color as selected by Project Designer
- [3. Decoplast Deco-Sil Siliconized Finish: 100% acrylic polymer-based, enhanced DPR acrylic finish with hydrophobic and photocatalytic properties, repels water, reflects UV rays, and reduces smog particles on the finish surface. Finish type, texture and color as selected by Project Designer

I. Water: Clean, cool, potable water

J. Portland Cement: ASTM C150, Type I or Type I-II.

2.4 RELATED MATERIALS AND ACCESSORIES

A. Substrate Materials:

- [1. Glass mat gypsum sheathing conforming to ASTM C1177.
- [2. Cement Fiber Sheathing conforming to ASTM C1186
- [3. Gypsum Sheathing: Minimum 1/2 in (13 mm) thick, core-treated, weather-resistant, exterior gypsum sheathing complying with ASTM C79.
- [4. Plywood: Minimum 7/16 in (8 mm) thick exterior grade or PS 1, Exposure 1, minimum 7/16 in thick, C veneer facing out, panels gapped 1/8 in at all edges.
- [5. Oriented Strand Board (OSB): 7/16 in - 1/2 in, approved by the APA, TECO, or PSI/PTL. Stamped as Exposure 1 or Exterior Sheathing with a PS2 or PRP-108 rating.
- [6. Concrete Masonry Units (CMU): Non-painted (uncoated).
- [7. Concrete (poured or pre-cast).
- [8. Other approved by manufacturer writing prior to the project.

B. Flashing: Refer to Division 07 Flashing Section for flashing materials.

C. Sealant System:

- [1. Sealant for expansion joints between panelized EIFS sections shall be ultra-low modulus designed for minimum 100% elongation and minimum 50% compression and as selected by Project Designer.

- [2. Sealant for perimeter seals around window and door frames and other wall penetrations shall be low modulus, designed for minimum 50% elongation and minimum 25% compression, and as selected by Project Designer.
- [3. Sealants shall conform to ASTM C 920, Grade NS.
- [4. Expansion joints between sections of EIFS shall have a minimum width of 3/4 in (19 mm).
- [5. Perimeter seal joints shall be a minimum width of 1/2 in (12.7 mm).
- [6. Sealant backer rod shall be closed-cell polyethylene foam.
- [7. Apply sealant to tracks or base coat of EIFS.
- [8. Color shall be as selected by Project Designer.
- [9. Joint design, surface preparation, and sealant primer shall be based on sealant manufacturer's recommendations and project conditions.

EDITOR NOTE: PART 3 EXECUTION BELOW INVOLVES ONSITE WORK AND SHOULD INCLUDE PROVISIONS FOR INCORPORATING MATERIALS AND PRODUCTS INTO PROJECT. TYPICALLY, "CONDITIONS OF THE CONTRACT" ESTABLISH RESPONSIBILITY FOR "MEANS, METHODS, TECHNIQUES, AND SAFETY" REQUIREMENTS OF CONSTRUCTION WITH CONTRACTOR. SPECIFICATIONS SHOULD AVOID CONFLICTS WITH THIS CONTRACTUAL PRINCIPLE.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify project site conditions under provisions of Section 01 00 00.
- B. Compliance: Comply with manufacturer's instructions for installation.
- C. Substrate Examination: Examine prior to installation of EIFS assembly materials as follows:
 - 1. Substrate shall be of a type approved by manufacturer. Plywood and OSB substrates shall be gapped 1/8 in (3.2 mm) at all edges.
 - 2. Substrate shall be examined for soundness, and other harmful conditions.
 - 3. Substrate shall be free of dust, dirt, laitance, efflorescence, and other harmful contaminants.
 - 4. Substrate construction in accordance with substrate material manufacturer's specifications and applicable building codes.
 - 5. Maximum deflection of the substrate shall be limited to L/240.
- D. Openings are flashed in accordance with the System Installation Details, or as otherwise necessary to prevent water penetration.
- E. Sealants and Backer Rod: To be installed, where required, in accordance with the sealant manufacturer's

specifications and published literature and using the sealant manufacturer's recommended primers.

- F. Advise Contractor of discrepancies preventing proper installation of the EIFS materials. Do not proceed with the work until unsatisfactory conditions are corrected.

3.2 PREPARATION

- A. Protection: Protect surrounding material surfaces and areas during installation of system.
- B. Clean surfaces thoroughly prior to installation.
- C. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 MIXING

- A. Mix materials in accordance with manufacturer's instructions.

3.4 INSTALLATION

- A. General: Installation shall conform to this specification and manufacturer's written instructions.
- B. Drainage Accessories and Water Resistive Barrier
 - 1. Plywood and OSB substrates cut edges (non-factory edges) must be sealed with a water-resistive coating.
 - 2. Install drainage tracks (limited to terminations at foundations), back-wrap mesh, or edge-wrap mesh at system terminations. Treat all glass mat gypsum sheathing, cement board sheathing, OSB and plywood joints with Decoplast Liquid Weather Resistive Barrier water-resistive barrier or Decoplast Speedcoat Moisture Barrier and Adhesive (trowel applied) and embed Decoplast Sheathing Tape.
 - 3. Flash all rough openings with Liquid Weather Resistive barrier or Speedcoat and embedded Decoplast Sheathing Tape or use Decoplast DecoShield Flashing Membrane.
 - 4. Apply Liquid Weather Resistive barrier to the surface of the appropriate substrate (in accordance with product data sheet).
 - 5. Treat the heads of all window, door, and similar openings with drainage track and back-wrap mesh to allow for drainage at these locations.
- C. Insulation Board
 - 1. Apply Decoplast adhesive to backs of insulation boards with a Decoplast drainage notched trowel, with ribbons of adhesive oriented in a vertical direction (parallel to the 2 ft (61 mm)) dimension of the EPS board).
 - 2. Install insulation board without gaps in a running bond pattern and interlocked at corners.
 - 3. Rasp irregularities off insulation board.

- D. Apply base coat and fully embed mesh in base coat; include diagonal mesh patches at corners of openings and reinforcing mesh patches at joints of track sections. Apply multiple layers of base coat and mesh where required for specified impact resistance classification.
- E. Apply primer to base coat after drying. Primer maybe omitted if it is not required by the manufacturer's product data sheets for the specified finish coat or otherwise specified for the project.
- F. Finish Coat: Apply finish coat to match specified finish type, texture, and color. Do not apply finish coat to surfaces to receive sealant. Keep finish out of sealant joint gaps.

3.5 FIELD QUALITY CONTROL

- A. The contractor shall be responsible for the proper storage and application of the materials.
- B. DECOPLAST assumes no responsibility for on-site inspections or application of its products.
- C. If required, the contractor shall certify in writing the quality of work performed relative to the substrate system, details, installation procedures, workmanship and as to the specific products used.
- D. If required, the EPS supplier shall certify in writing that the EPS meets code specifications.
- E. If required, the sealant contractor shall certify in writing that the sealant application is in accordance with the sealant manufacturer's recommendations.

3.6 CLEAN-UP

- A. Removal: Remove and legally dispose of EIFS materials from job site.
- B. Clean surfaces and work area of foreign materials resulting from material installation.

3.7 PROTECTION

- A. Provide protection of installed materials from water infiltration into or behind them.
- B. Provide protection of installed materials from dust, dirt, precipitation, and freezing during installation, and continuous high humidity until fully cured and dry.
- C. Clean exposed surfaces using materials and methods recommended by the manufacturer of the material or product being cleaned. Remove and replace work that cannot be cleaned to the satisfaction of the Project Designer/Owner.

END OF SECTION

Rev. OCT 2020

EIFS Fire Performance	Method	ICC or ASTM Criteria	Results
Surface Burning Characteristics	ASTM E84	Individual components shall each have a flame spread <25, and smoke developed < 450	Flame Spread: 0 to 15 Smoke Developed: 0 to 15
Flame Propagation	NFPA-285	No flame spread on exterior	PASS (UL File #R38721)
Ignitability	NFPA-268	Determining ignitability of exterior wall assemblies using a radiant heat source	SWRI Project # 01.21604.01.209
Fire Resistance	ASTME-119		PASS (UL File # R38721)

EIFS Strength	Method	ICC or ASTM Criteria	Results
Flexural Strength	ASTM C203	No Requirement	60.6 psi (418 kPa)
Falling Ball Impact	ASTM D1037	No Requirement	92 to over 600 in-lbs
Creep Resistance of Adhesive	ASTM D2294	No Requirement	28 days 208 psf shear stress; no creep
Gardner Impact Test	ASTM D2794	No Requirement	25 to 200 in-lbs (mesh weight)
Transverse Wind Load	ASTM E330	Withstand positive and negative wind loads as specified	See Current ICC Report
Impact Load	ASTM E695	No Current Requirement	30 lb. Impact mass; no cracking
Tensile Bond Strength	ASTM E2134	Minimum 15 psi (103kPa)	Pass

EIFS Environmental Durability	Method	ICC or ASTM Criteria	Results
Abrasion Resistance	ASTM D 968	No cracking or loss of film at 528 quarts (500 L) of sand	Pass @ 500 Liters
Accelerated Weathering	ASTM G153 (ASTM G 23) ASTM G154	No deleterious effects* at 2000 hours when viewed under 5x magnification	2000 Hours: no deleterious effect 2000 Hours: no deleterious effect
Drainage Efficiency	ASTM E2273		Pass
Fungus Resistance	MIL STD 810B		28 days: no growth

Product Performance

EIFS Environmental Durability	Method	ICC or ASTM Criteria	Results
Freeze/Thaw Resistance	ASTM E 2485	No deleterious effects* at 10 cycles when viewed under 5x magnification	60 cycles: no deleterious effect
Mildew Resistance	ASTM D 3273	No growth supported during 28 day exposure period	Pass
Water Penetration	ASTM E 331	No water penetration beyond the plane of the base coat/EPS board interface after 15 minutes at 6.24 psf (299 Pa)	Pass
Moisture Resistance	ASTM D2247	No deleterious effects at 14 day exposure	Pass
Salt Fog Resistance	ASTM B117	No deleterious effects* at 300 hours	500 hours: no deterioration
Wind-Driven Rain	F.S. TT-C-555B		24 hours: no penetration of water

**No deleterious effects: no cracking, checking, crazing, erosion, rusting, blistering.*

DECOPLAST Liquid Weather Resistive Barrier/ Speedcoat	Method	ICC and ASTM E2570 Criteria	Results
Accelerated Weathering	AC 212	25 Cycles followed by Hydrostatic Pressure Test: No water penetration on the plane of the exterior facing side of the substrate.	Pass: no water penetration
Air Infiltration	ASTM E2178	Calculated flow Rate at 75 Pa (1.57 lb/ft ² , 0.3 in H ₂ O) = < 0.02 L/m ² *s (< 0.004 cfm/ft ²)	< .00001 L/m ² *s (0.00001 cfm/ft ²) at 75 Pa (1.57 lb/ft ² , 0.3 in H ₂ O)
Air Leakage of Air Barrier Assemblies	ASTM E2357	Pass < 0.2 L / s·m ² at 75 Pa) (< 0.04 cfm / ft ² at 1.57 psf)	Pass
Air Leakage	ASTM E283	No Criteria	< 0.004 cfm/ft ²
Elongation	ASTM D412	No Criteria	360%
Flexibility	ASTM D522	No Criteria	No Cracking at 1/8" (3 mm)
Freeze-Thaw Resistance	ASTM E 2485	10 Cycles	Pass – No Deleterious Effects
Hydrostatic Pressure Test	AATCC 127 (Water Column)	Resist 21.6 in (55 cm) water for 5 hours before and after aging	Pass: no water penetration
Nail Seal ability, Head of Water	ASTM D1970	No Criteria	Pass 5 inches of water
Pull off Strength	ASTM D 4541	No Water Penetration	Pass - no water penetration

Decoplast Liquid Weather Resistive Barrier	Method	ICC and ASTM E2570 Criteria	Results
Racking	ASTM E72	Deflection at 1/8 in (3.2 mm)	Pass -No cracking at field, joints or flashing connection
Structural Loading	ASTM E1233 Procedure A	10 Cycles @ 80% design load	Pass -No cracking at field, joints or flashing connection
Restrained Environmental	ICC ES AC 212 / ASTM E2570	5 Cycles of wetting and drying	Pass -No cracking at field, joints or flashing connection
Surface Burning Characteristics	ASTM E84	ICC and ASTM E2568 Flame Spread <25 Smoke Developed <450	Flame Spread =0 Smoke Developed =0
Tensile Bond Strength	ASTM E 2134/ ASTM C 297	Minimum 15 psi (104 kPa)	Pass all listed substrates and flashing materials
Water Resistance	ASTM D 2247	14 Days	Pass – No Deleterious Effects.
Water Penetration	ASTM E331	2.86 psf (137 Pa) for 15 minutes	Pass 25.4 psf (1216 Pa) for 165 minutes
Water Penetration	ASTM E331	Tested after Structural Loading, Racking and Restrained Environmental Cycling at 2.86 psf (137 Pa) for 15 minutes	No Water Penetration
Water vapor transmission	ASTM E96 Procedure B	Vapor Permeable	12.0 perms
Weathering	ICC ES AC 212 / ASTM E2570	210 hours of UV Exposure, 25 cycles of accelerated weathering, 21.6 in (549 mm) water column for 5 hours	Pass
Wind Driven Rain	F.S. TT-C-555B	No Criteria	Pass
VOC	EPA Reference Test Method 24	US EPA, South Coast AQMD and Green seal Standard	10 g/L
Regional Harvest		LEED MRc 5.1	100% at all facilities

REINFORCING MESH IMPACT RESISTANCE	Classification	Impact Range (in-lbs.)
Standard Mesh	Standard	25-49
Intermediate Impact 10 Mesh	Intermediate	50-89
High Impact 15 Mesh (Plus Standard Mesh)	High	90-150
Ultra-High Impact 20 Mesh /Standard Mesh	Ultra High	>150

Where several tests on different materials are summarized, a range of values is shown. This summary has been prepared to provide quick but partial information on how certain combinations of Decoplast products perform during certain tests. It is not a complete description of the test procedures or of the results thereof. Copies of original test reports are available at no charge upon request. Please contact Decoplast Architectural Sales or Technical Support Department (860.761.2830) if further information is required




697 Oakwood Avenue, West Hartford, CT 06110
voice: 860.761.2830 fax: 860.761.2831

Disclaimer

This information and all further technical advice are based on Greenmaker Industries of CT, LLC present knowledge and experience. However, Greenmaker Industries assumes no liability for providing such information and Greenmaker Industries disclaims any and all **CONDITIONS AND WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY. GREENMAKER INDUSTRIES SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT, OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND.** Greenmaker Industries reserves the right to make any changes according to technological progress or further developments. It is the customer's responsibility and obligation to carefully inspect and test any incoming goods. Performance of the product(s) described herein should be verified by testing and carried out only by qualified experts. It is the sole responsibility of the customer to carry out and arrange for any such testing. Reference to trade names used by other companies is neither a recommendation, nor an endorsement of any product and does not imply that similar products could not be used.

For more information visit www.decoplast.com

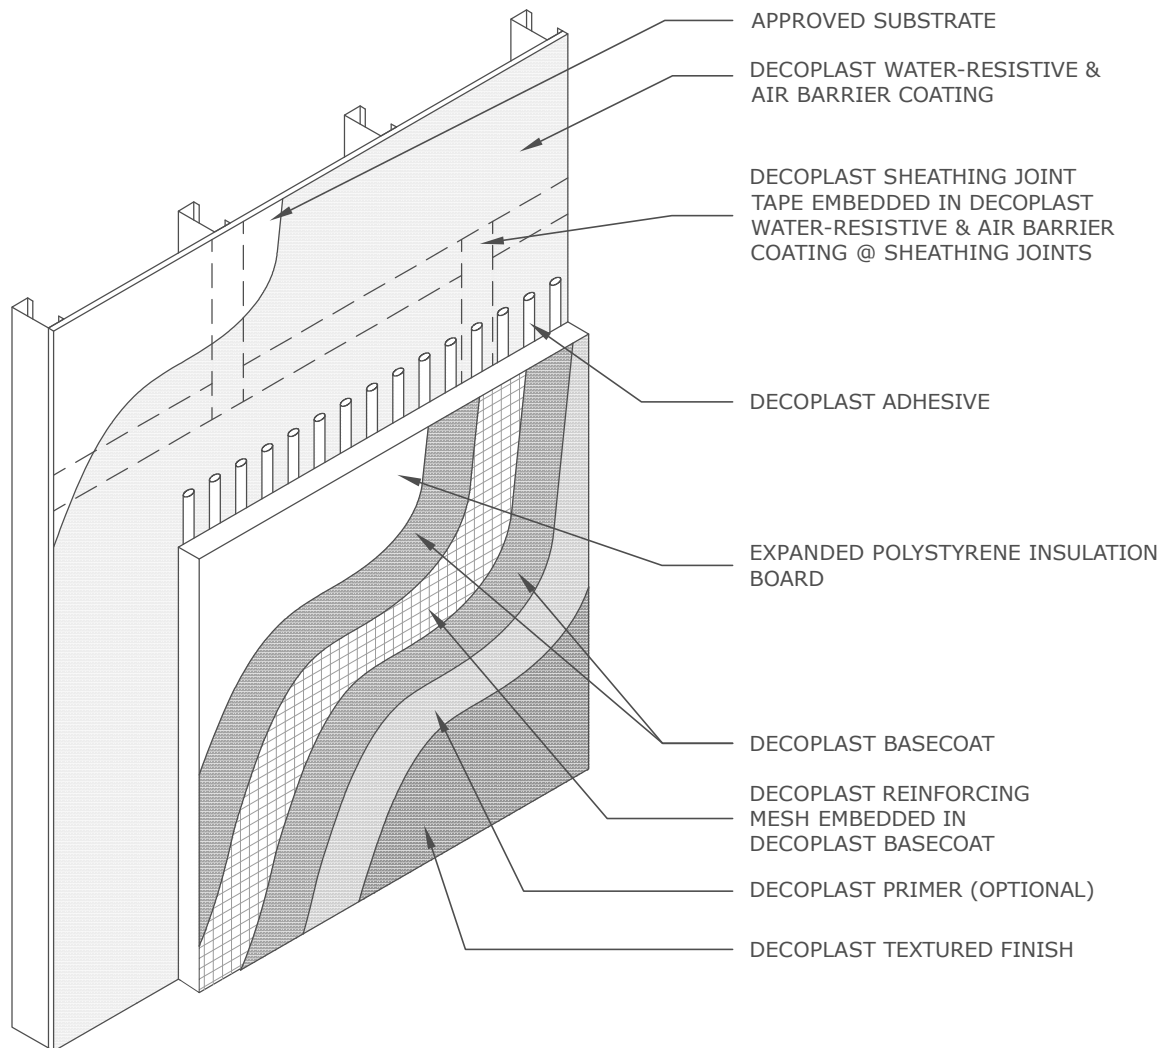


DSWM G1.01 DDARS NOTCHED SYSTEM COMPONENTS

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: 1. Applicable for wood framing, masonry and concrete.
2. See WRB details for further information.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

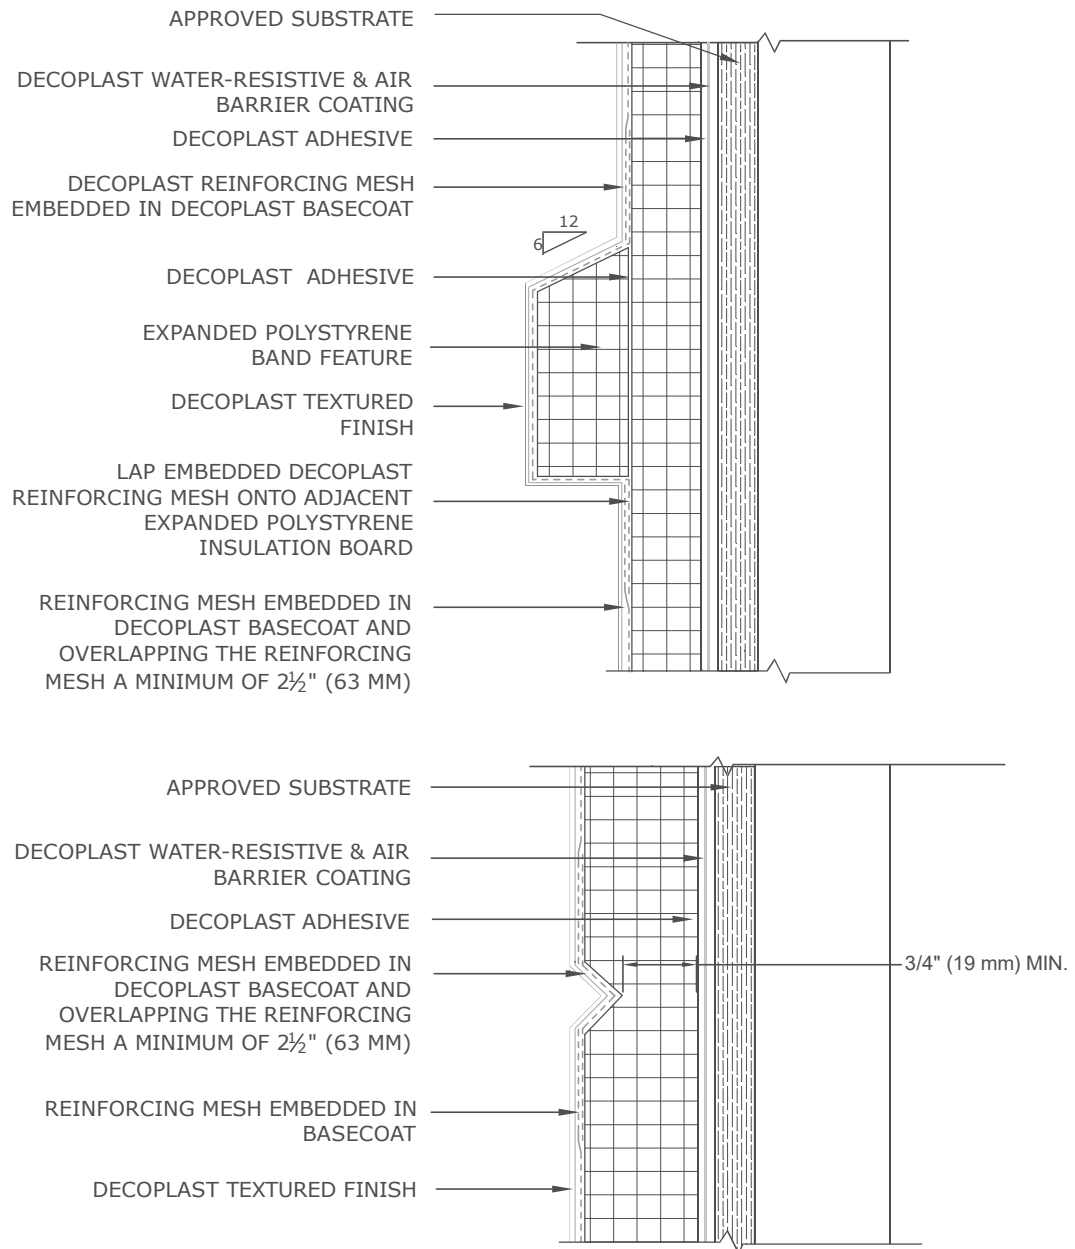


DSWM A1.01 DDARS NOTCHED AESTHETIC BAND AND REVEAL

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

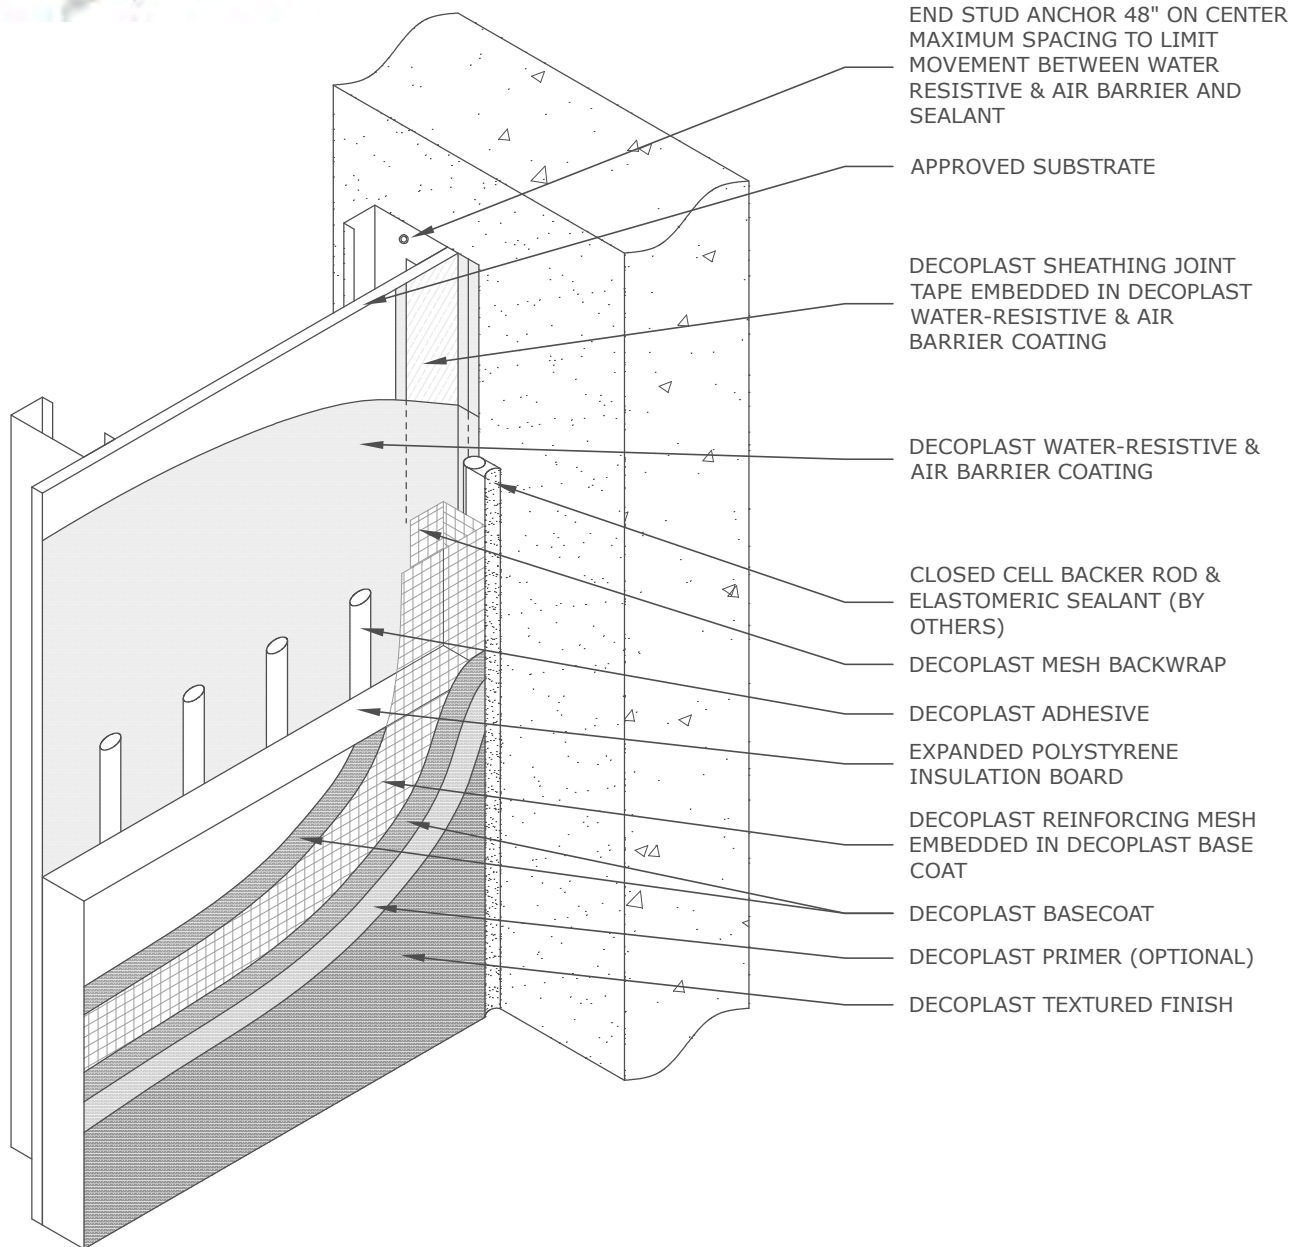


DSWM E1.01 DDARS NOTCHED INSIDE CORNER TERMINATION

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. There must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

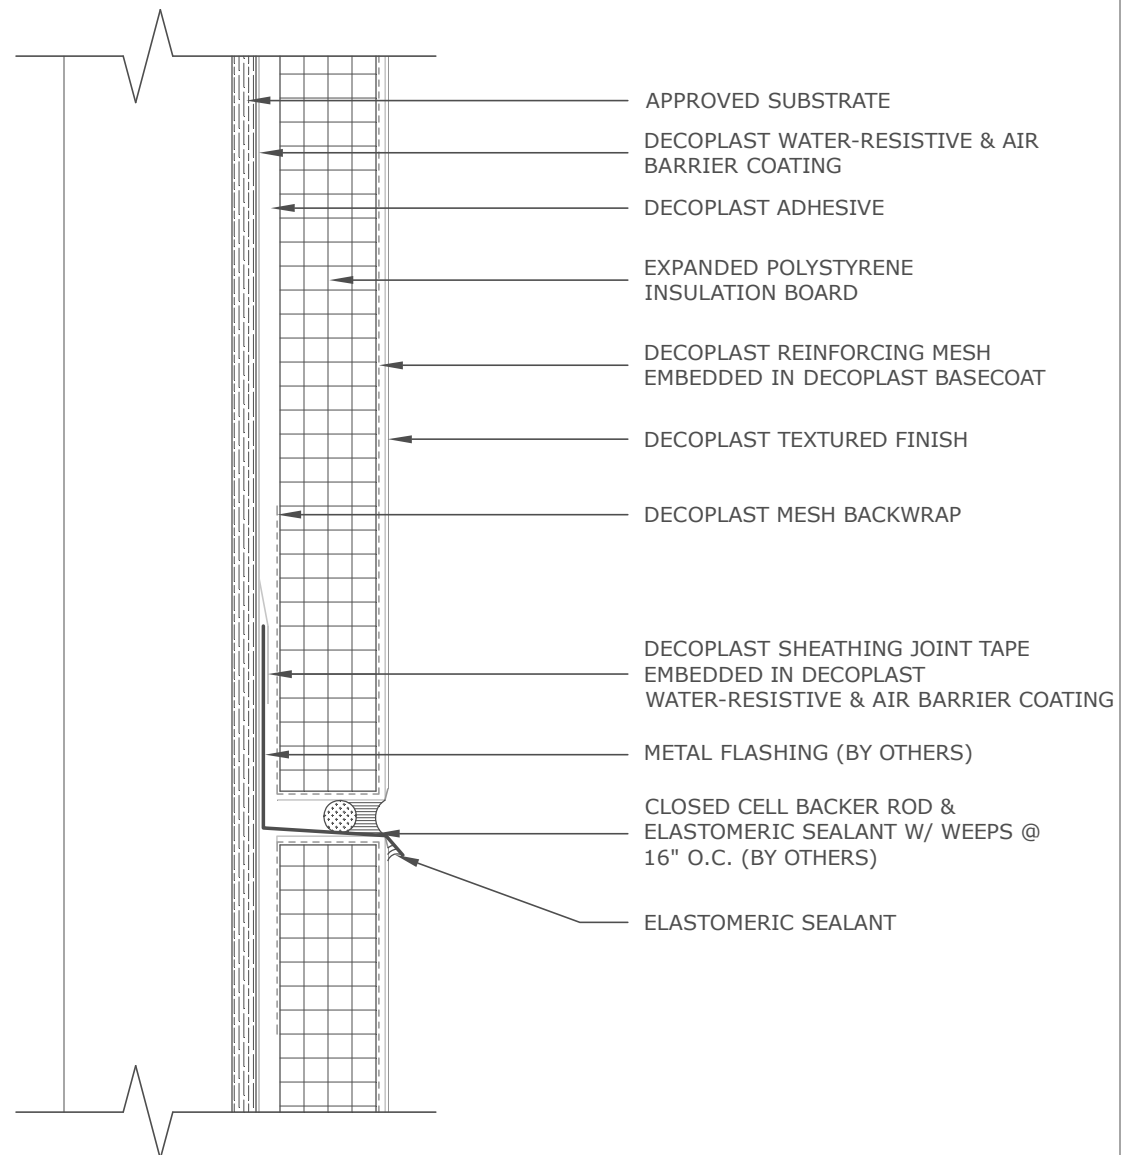


DSWM E1.02 DDARS NOTCHED THRU-SYSTEM FLASHING W/ WEEPS

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

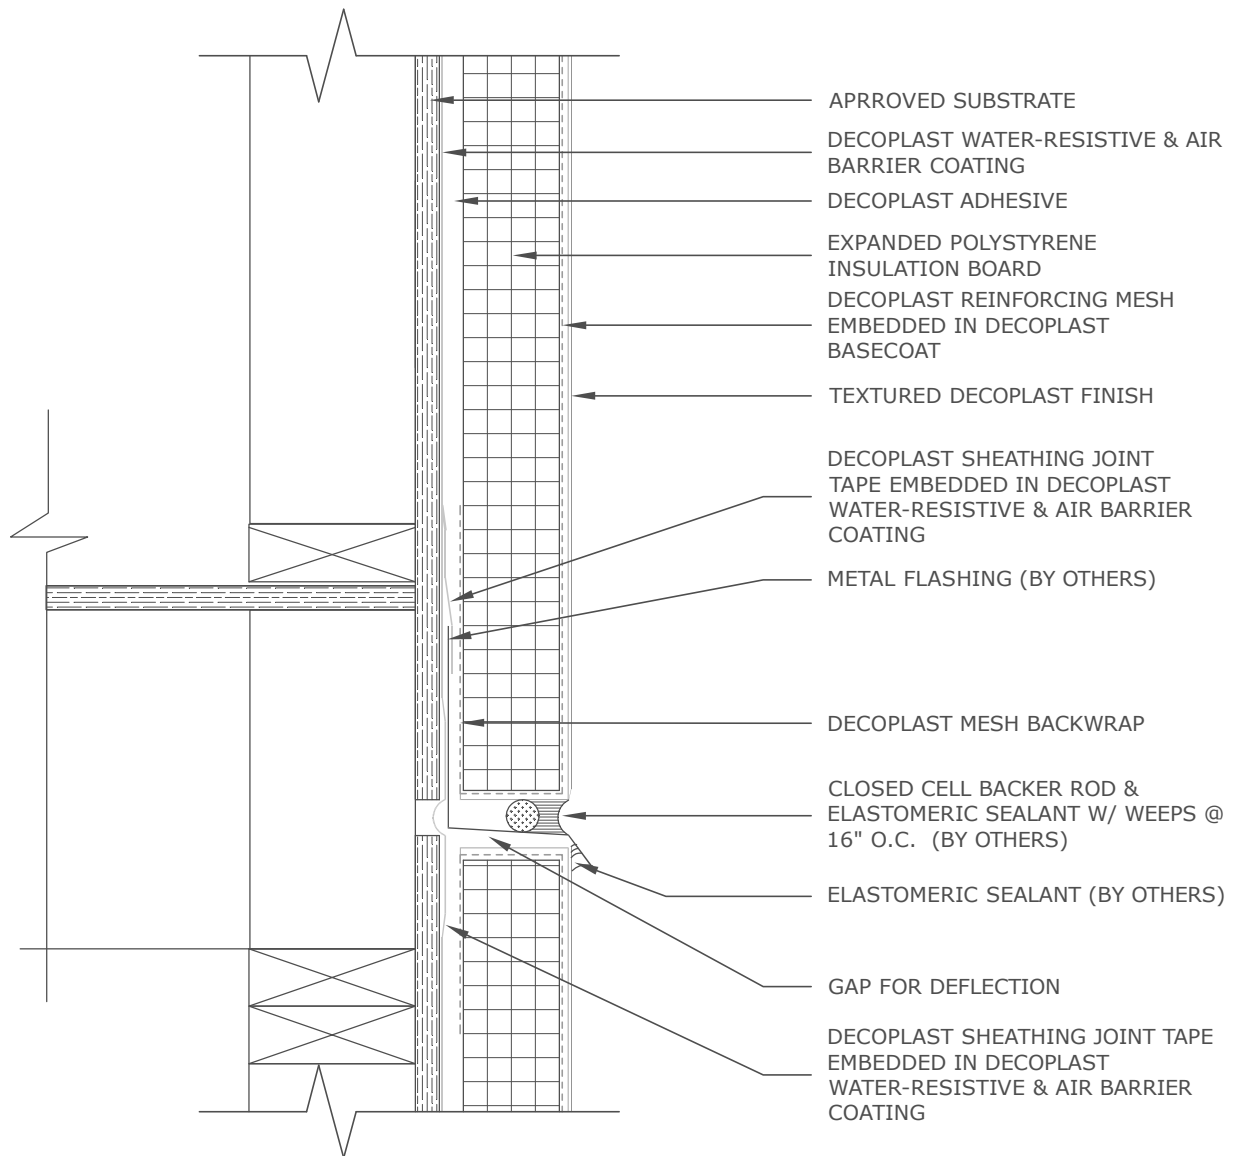


DSWM E1.05A DDARS NOTCHED EXPANSION JOINT WITH FLASHING AT FLOOR

DECOPLAST DDARS NOTCHED - 6/1/2016

- NOTE:
1. To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.
 2. Framing shown in this drawing is only conceptual and is not for construction. Follow framing designer's requirements.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

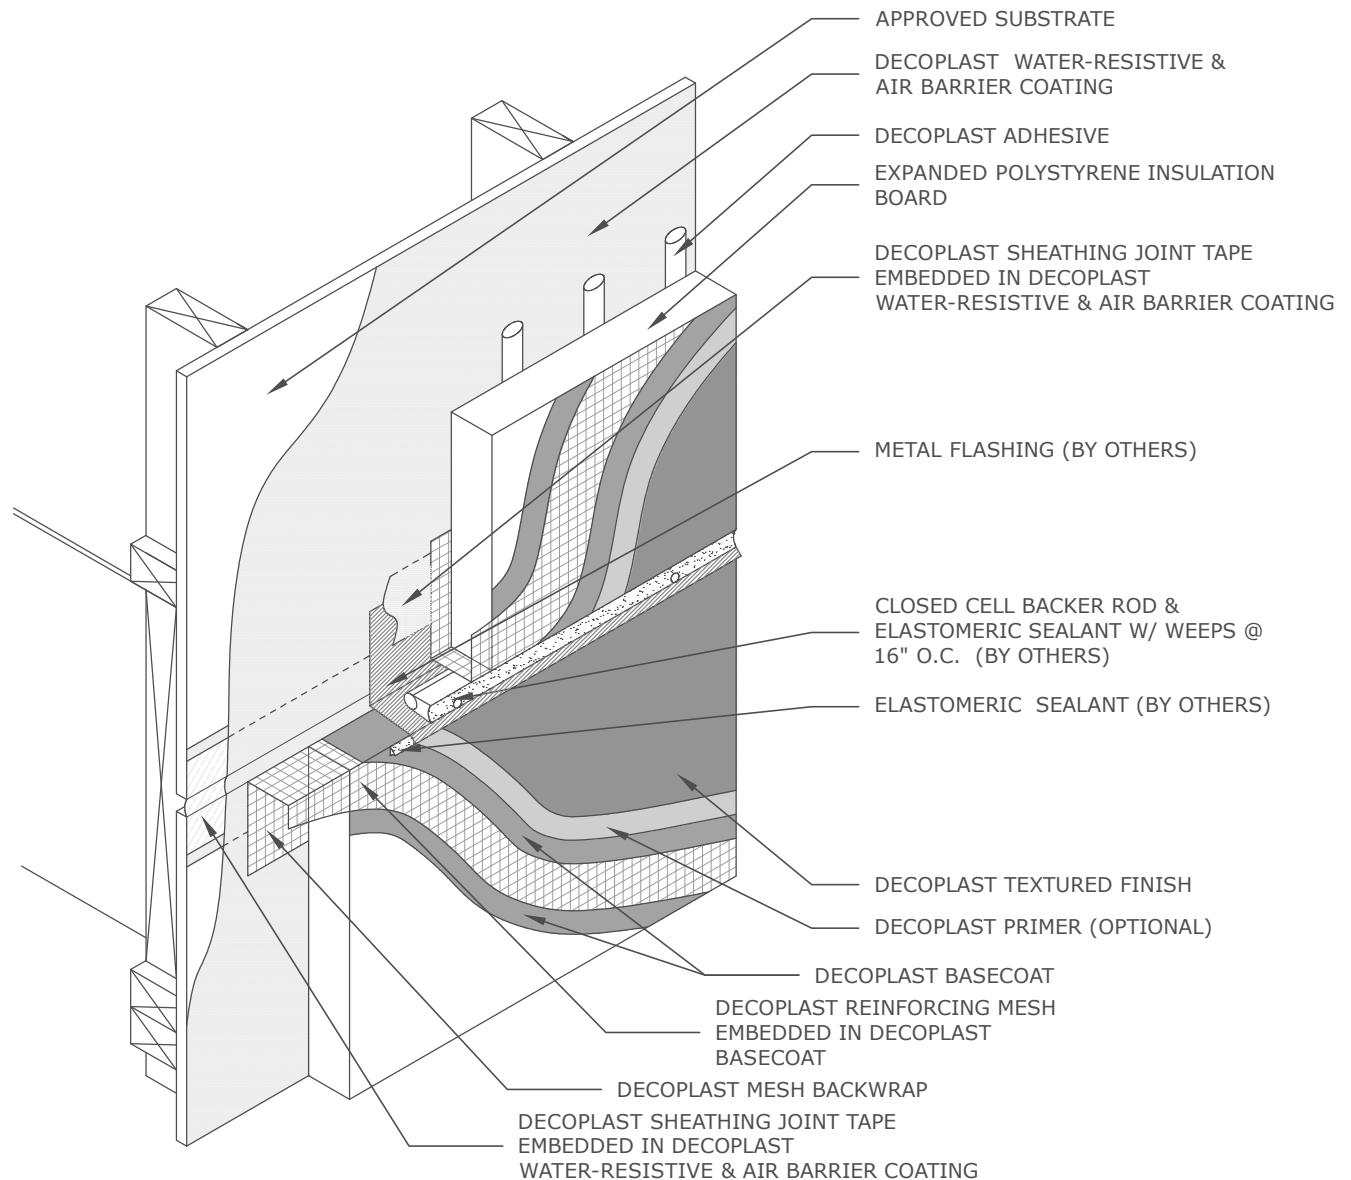


DSWM E1.05B DDARS NOTCHED EXPANSION JOINT WITH FLASHING AT FLOOR

DECOPLAST DDARS NOTCHED- 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

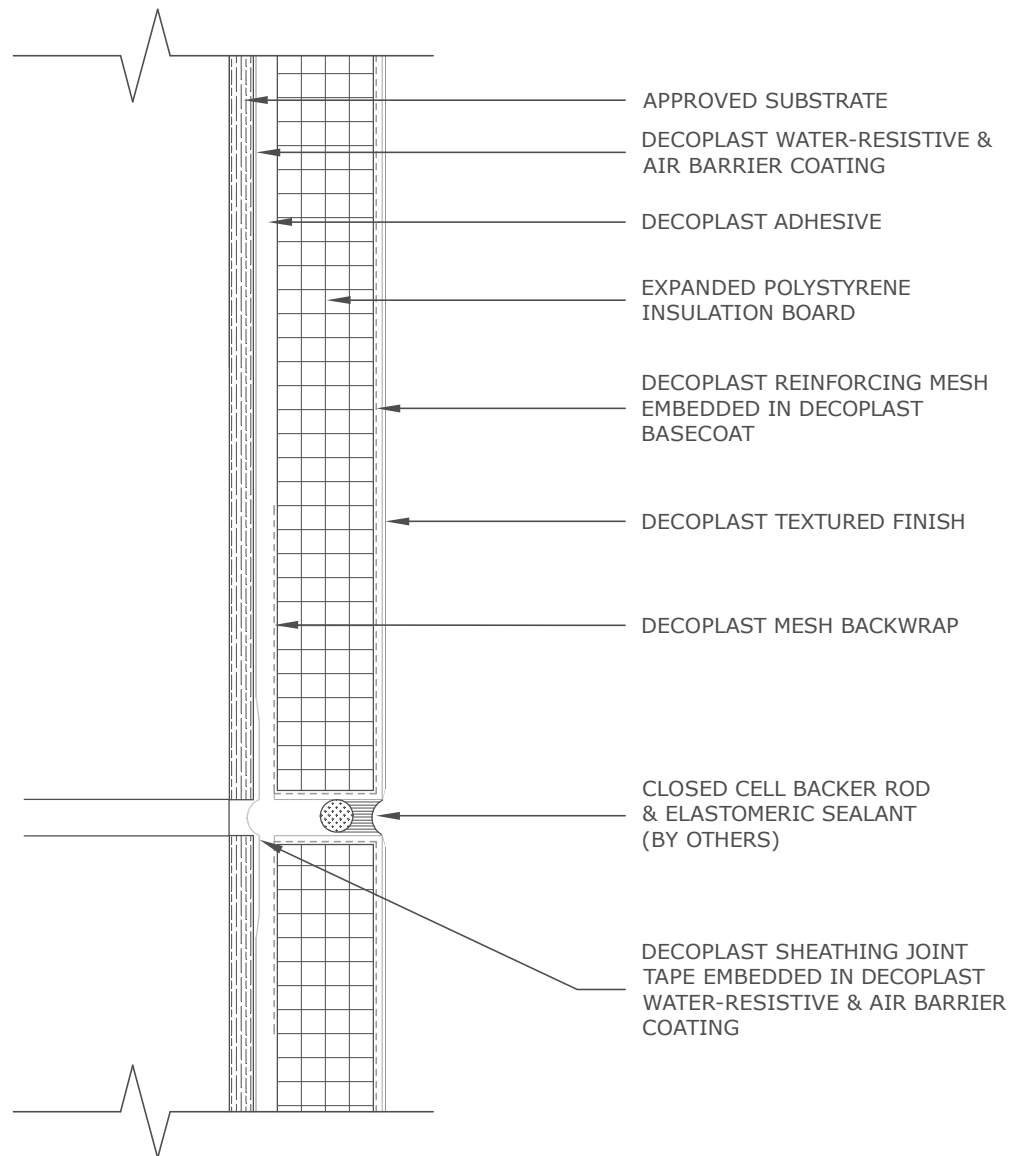


DSWM E1.07 DDARS NOTCHED HORIZONTAL EXPANSION JOINT

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

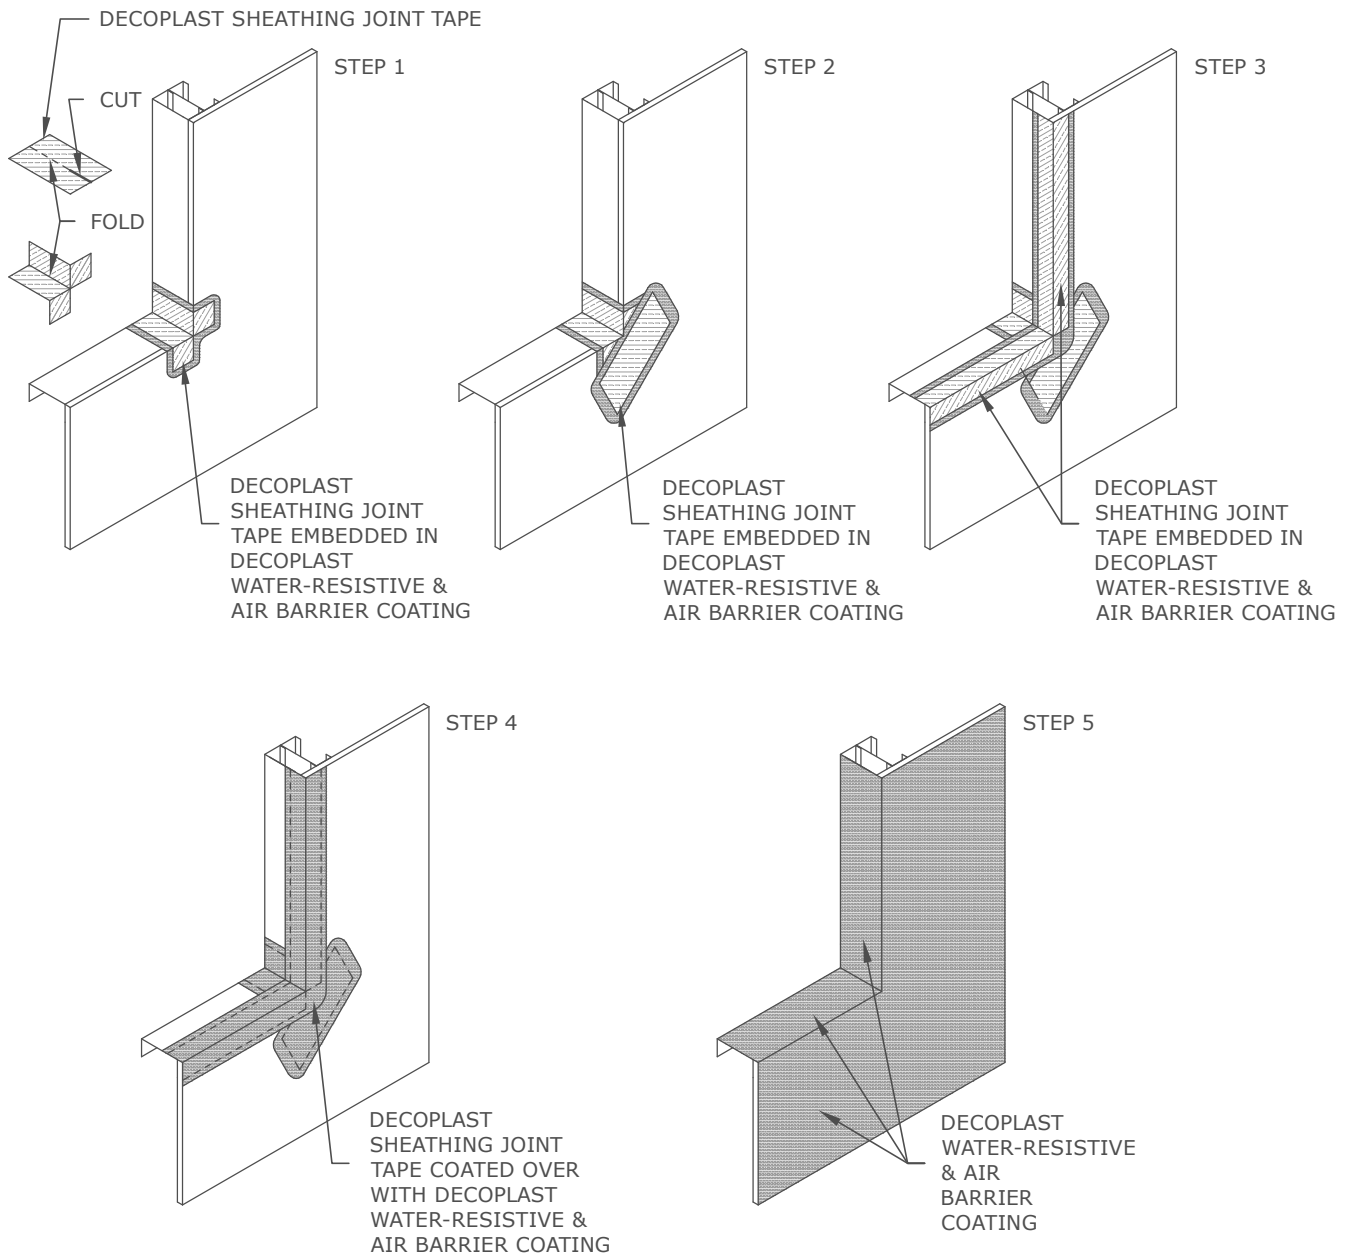



DSWM G1.03A DDARS NOTCHED ROUGH OPENING FLASHING (SEE NOTES)

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE:



1. Head flashing procedure similar.
2. To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

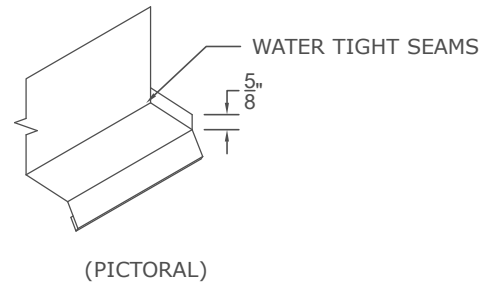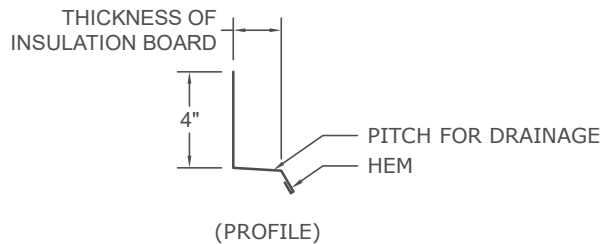

METAL HEAD FLASHING PROFILE

HEAD FLASHING SHOULD BE FABRICATED IN THE PROFILE SHOWN. LENGTH OF FLASHING IS 1" LONGER THAN THE WIDTH OF THE WINDOW FRAME. END DAMS SHOULD BE TURNED UPWARD 5/8" AS SHOWN.

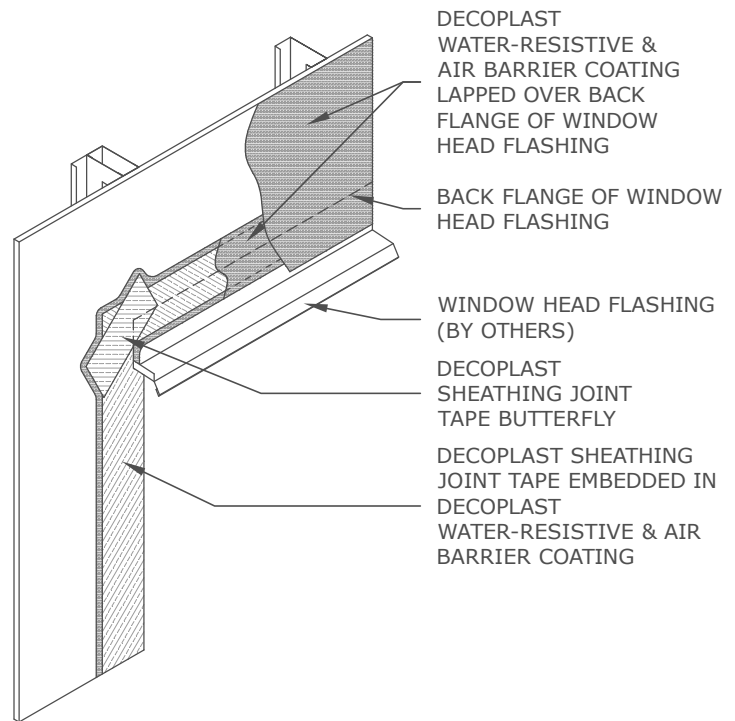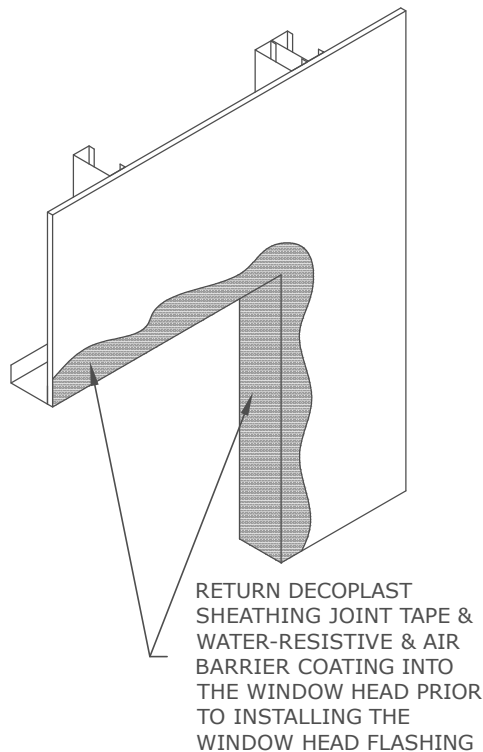


DSWM G1.03B DDARS NOTCHED ROUGH OPENING FLASHING PROCEDURE CONT.

DECOPLAST DDARS NOTCHED - 6/1/2016

- NOTE:
1. To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.
 2. Finned window frames are installed before head flashing.
 3. Do not use plastic track at window heads.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

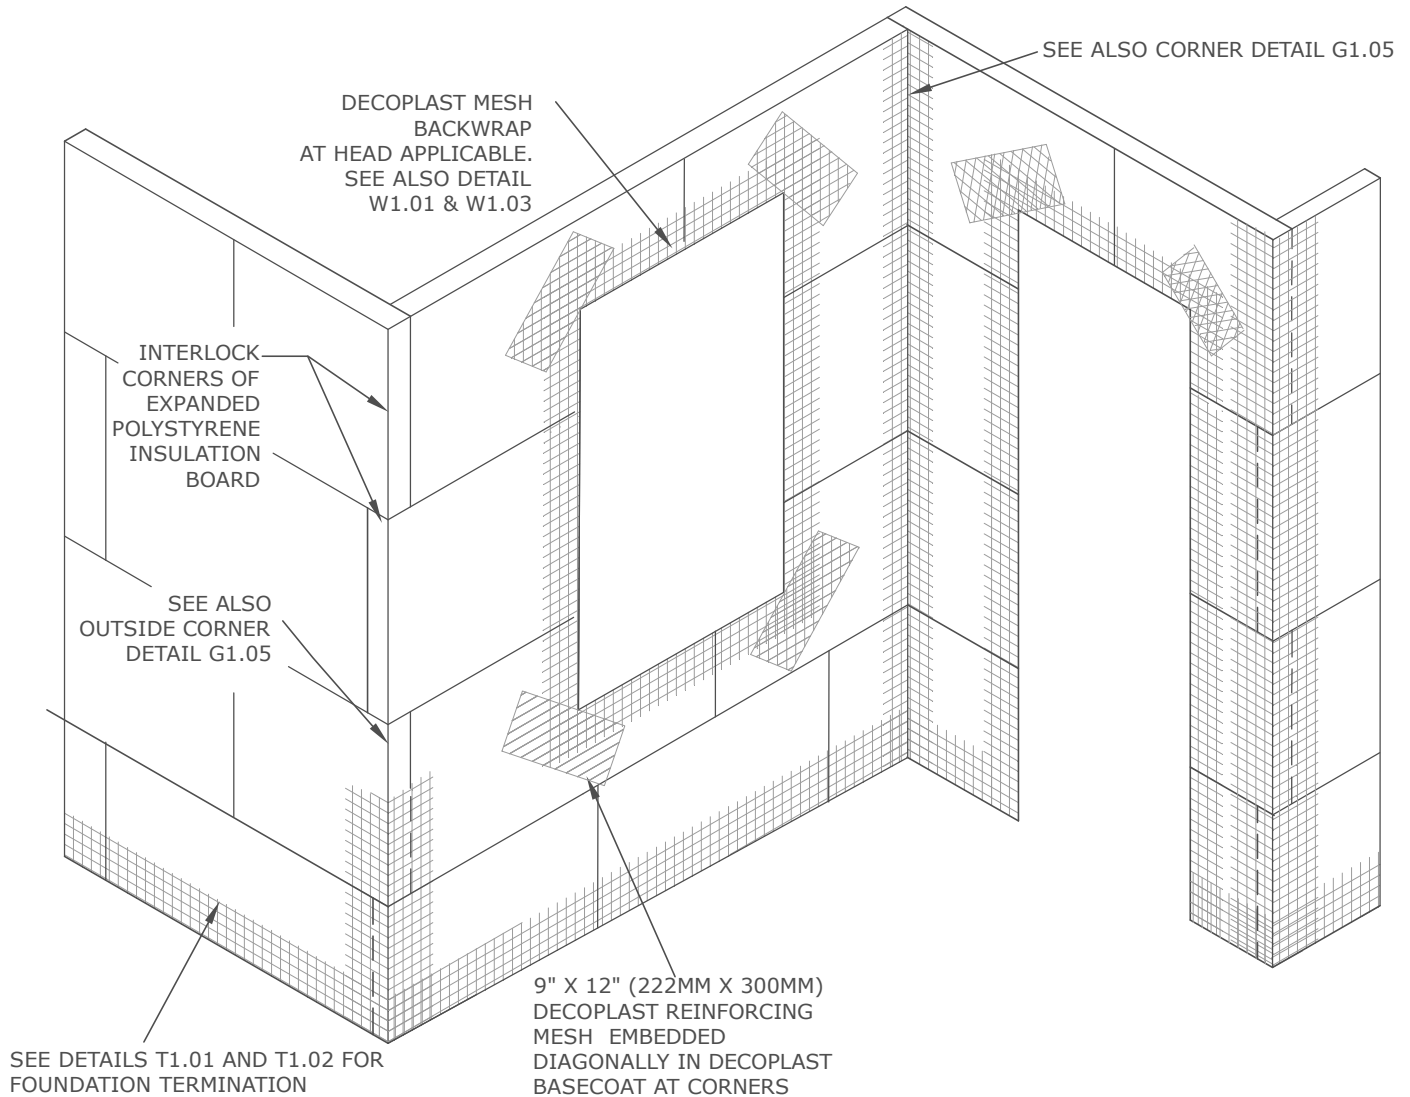


DSWM G1.04 DDARS NOTCHED PRELIMINARY MESH APPLICATION

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: EXPANDED POLYSTYRENE INSULATION BOARD JOINTS ARE OFFSET FROM WITH CORNERS OF OPENINGS

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

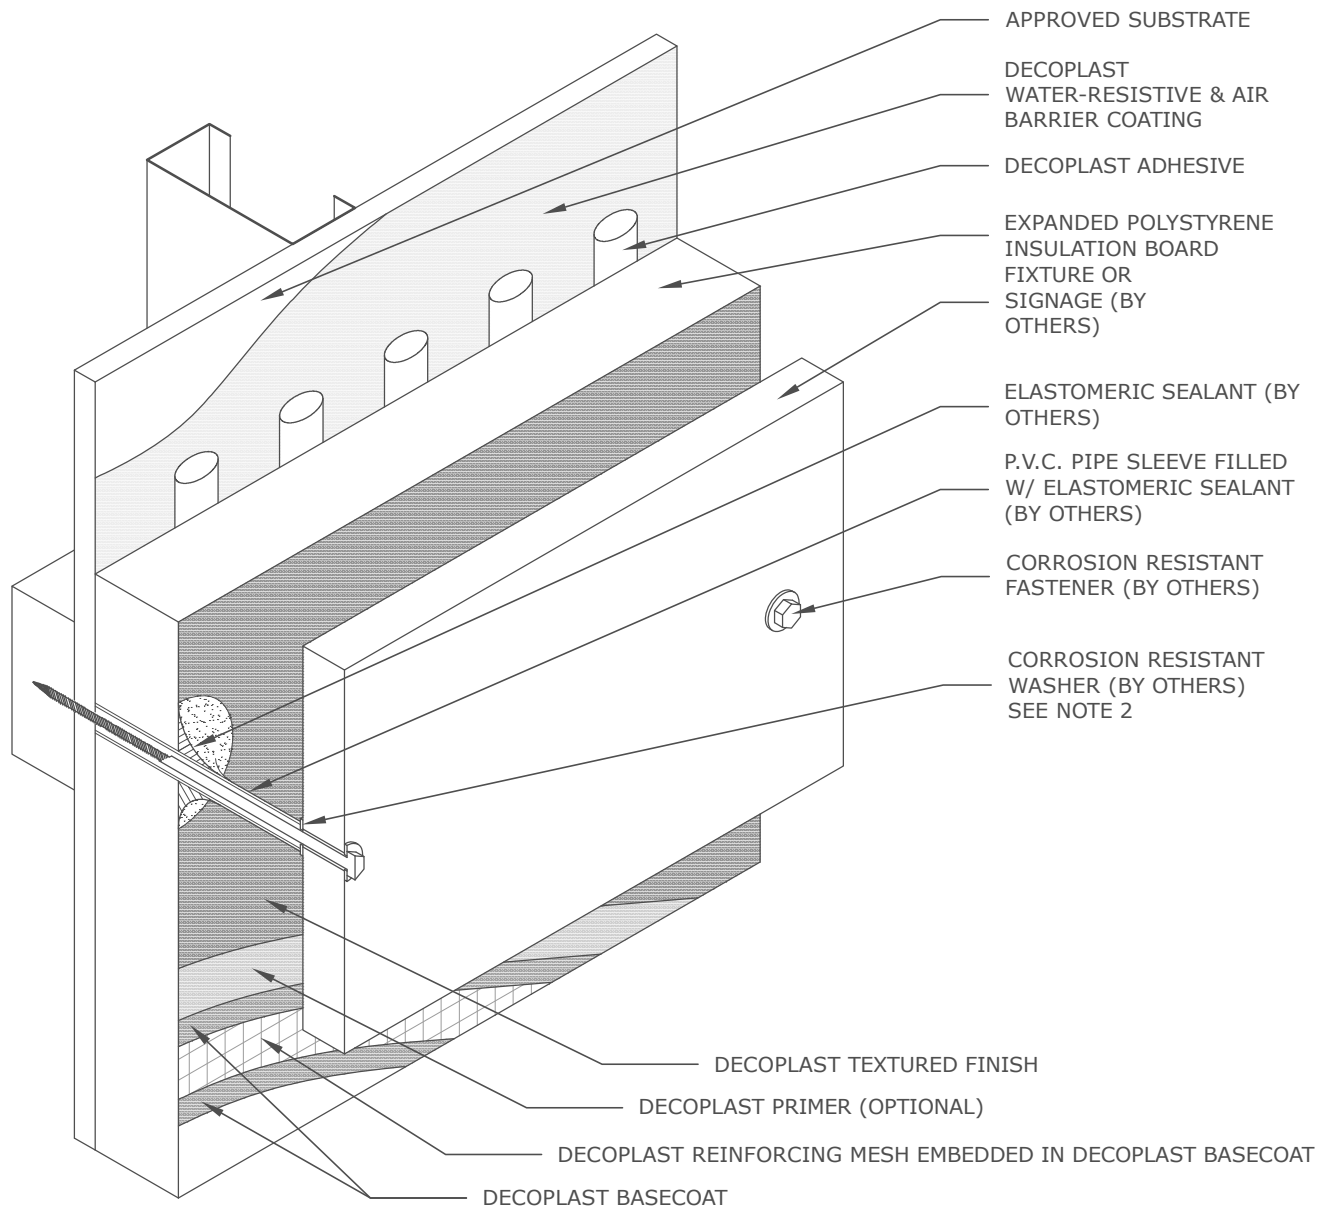


DSWM P1.01 DDARS NOTCHED FIXTURE ATTACHMENT (BY OTHERS)

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE:

1. To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.
2. Fixture attachment shall be designed and installed to support all fixture loads and to prevent transfer of fixture loads to the EIFS.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

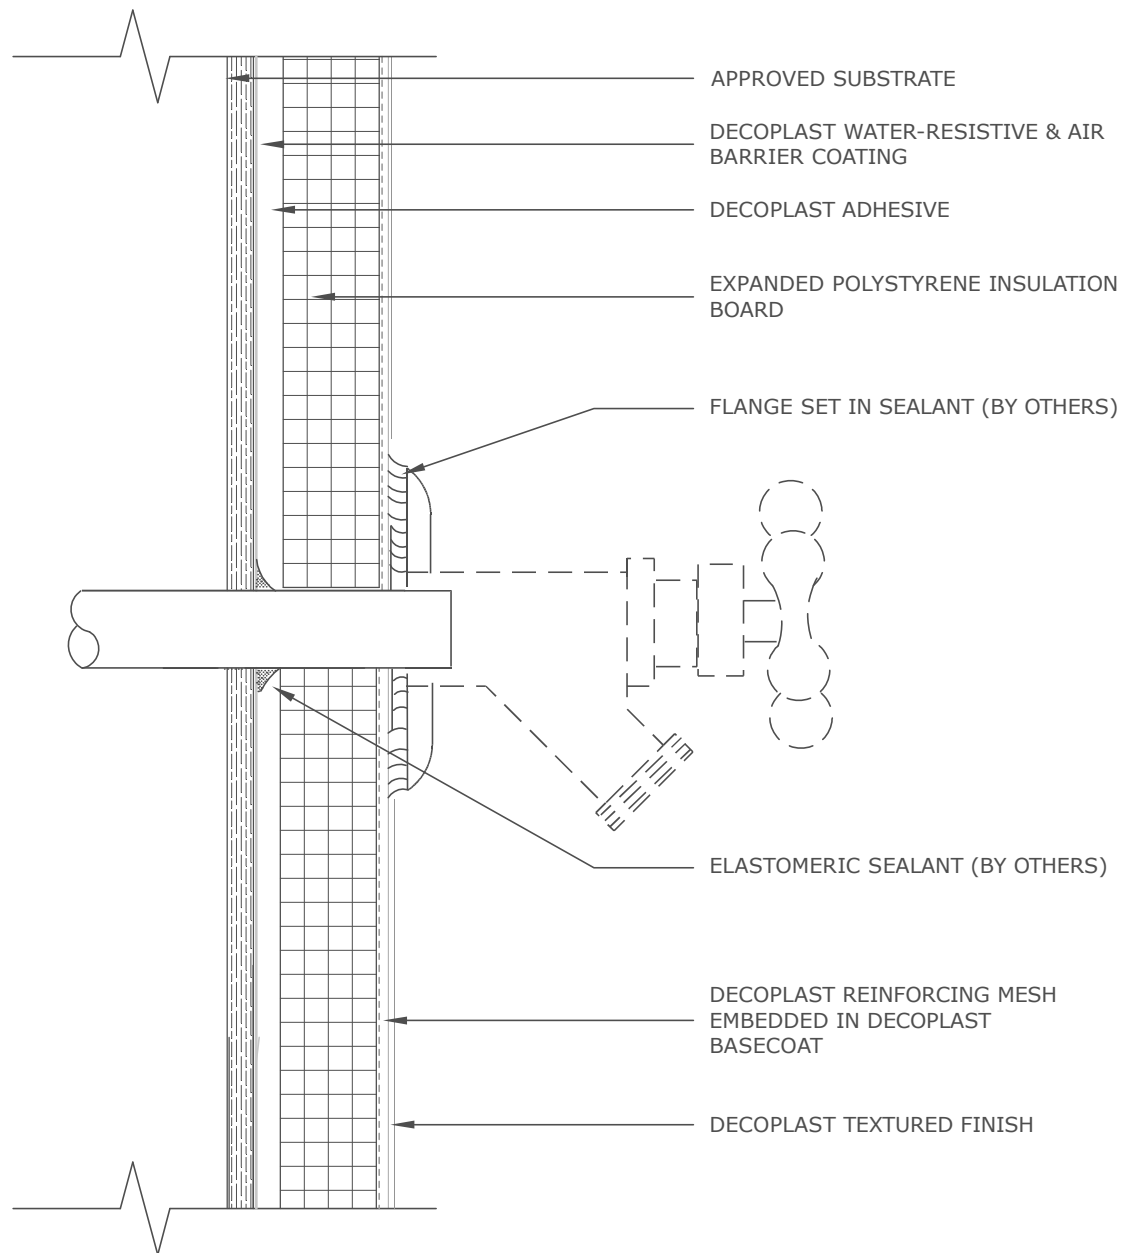


DSWM P1.02 DDARS NOTCHED TERMINATION AT HOSE BIB (BY OTHERS)

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

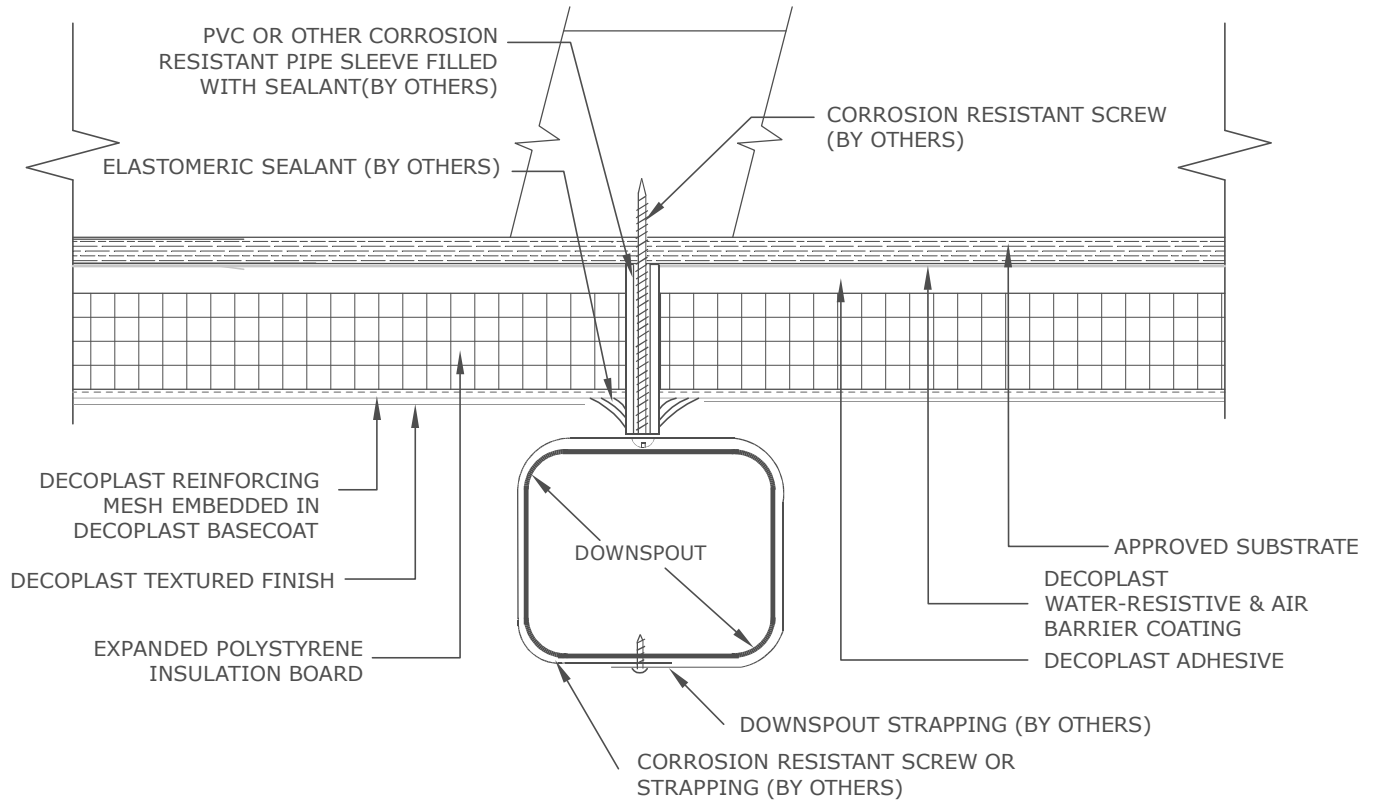


DSWM P1.03 DDARS NOTCHED DOWNSPOUT ATTACHMENT (BY OTHERS)

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

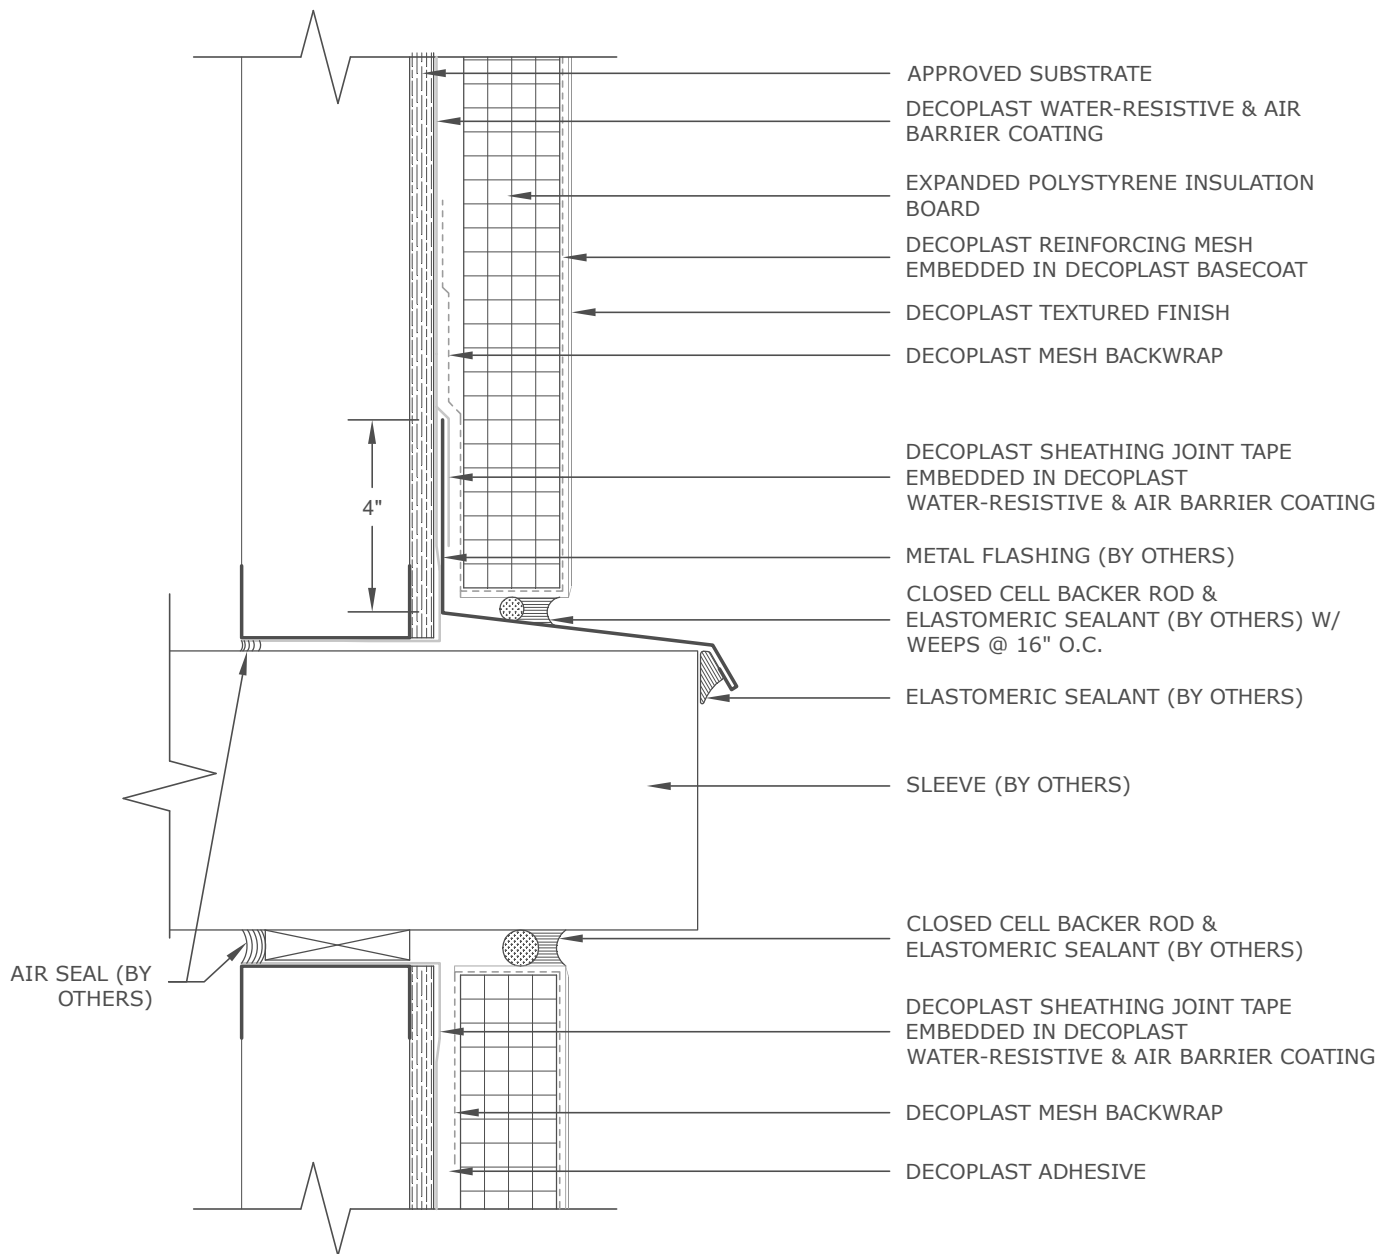


DSWM P1.04 DDARS NOTCHED TERMINATION AT APPLIANCE SLEEVE (BY OTHERS)

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

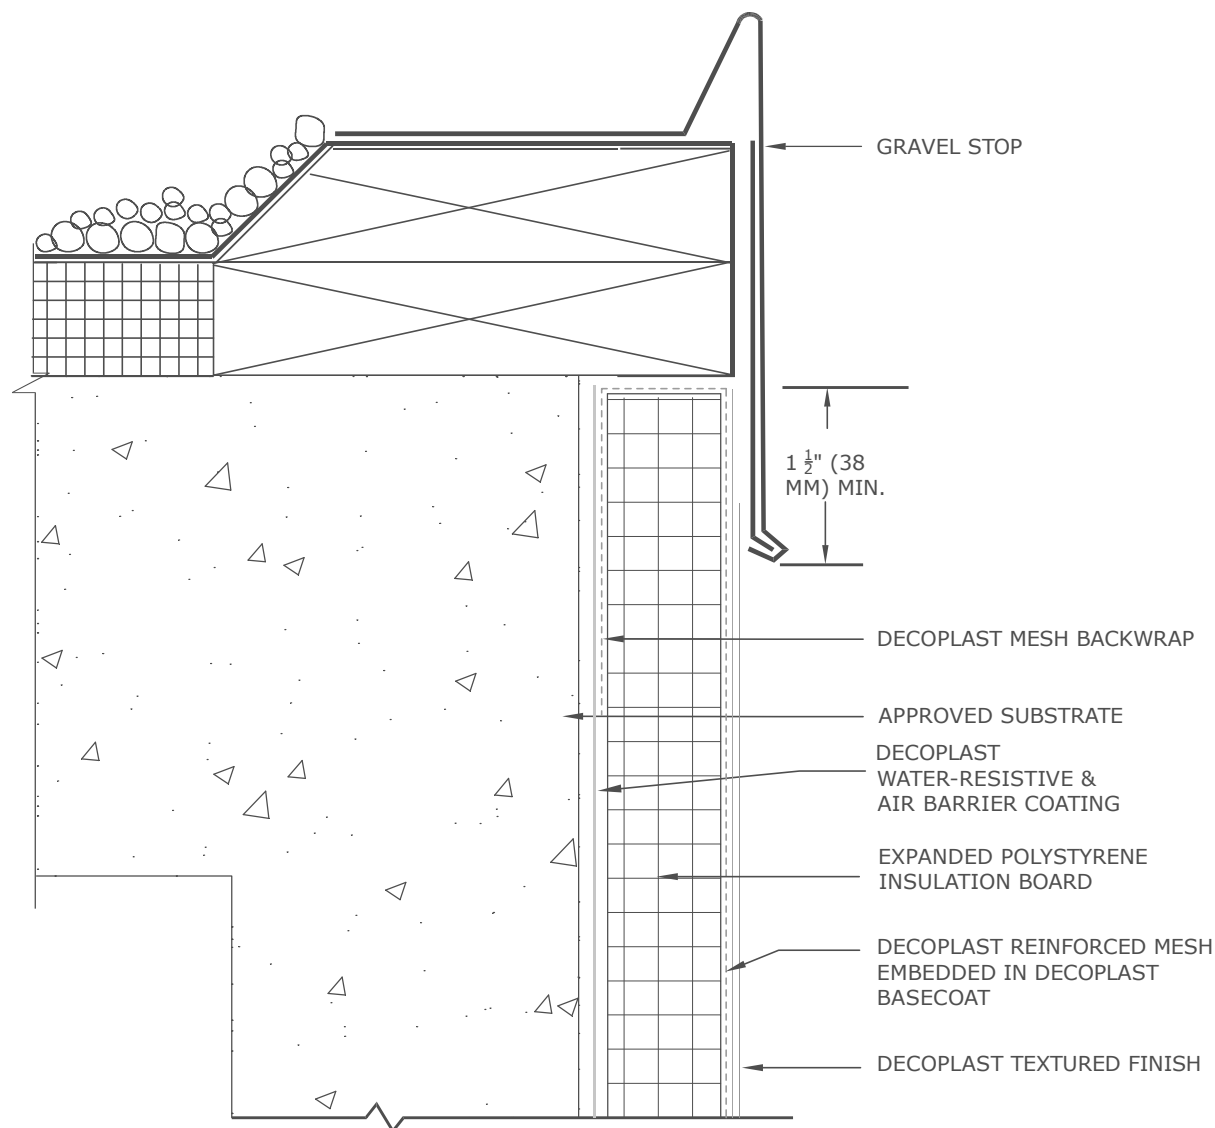


DSWM R1.04 DDARS NOTCHED TERMINATION AT GRAVEL STOP

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

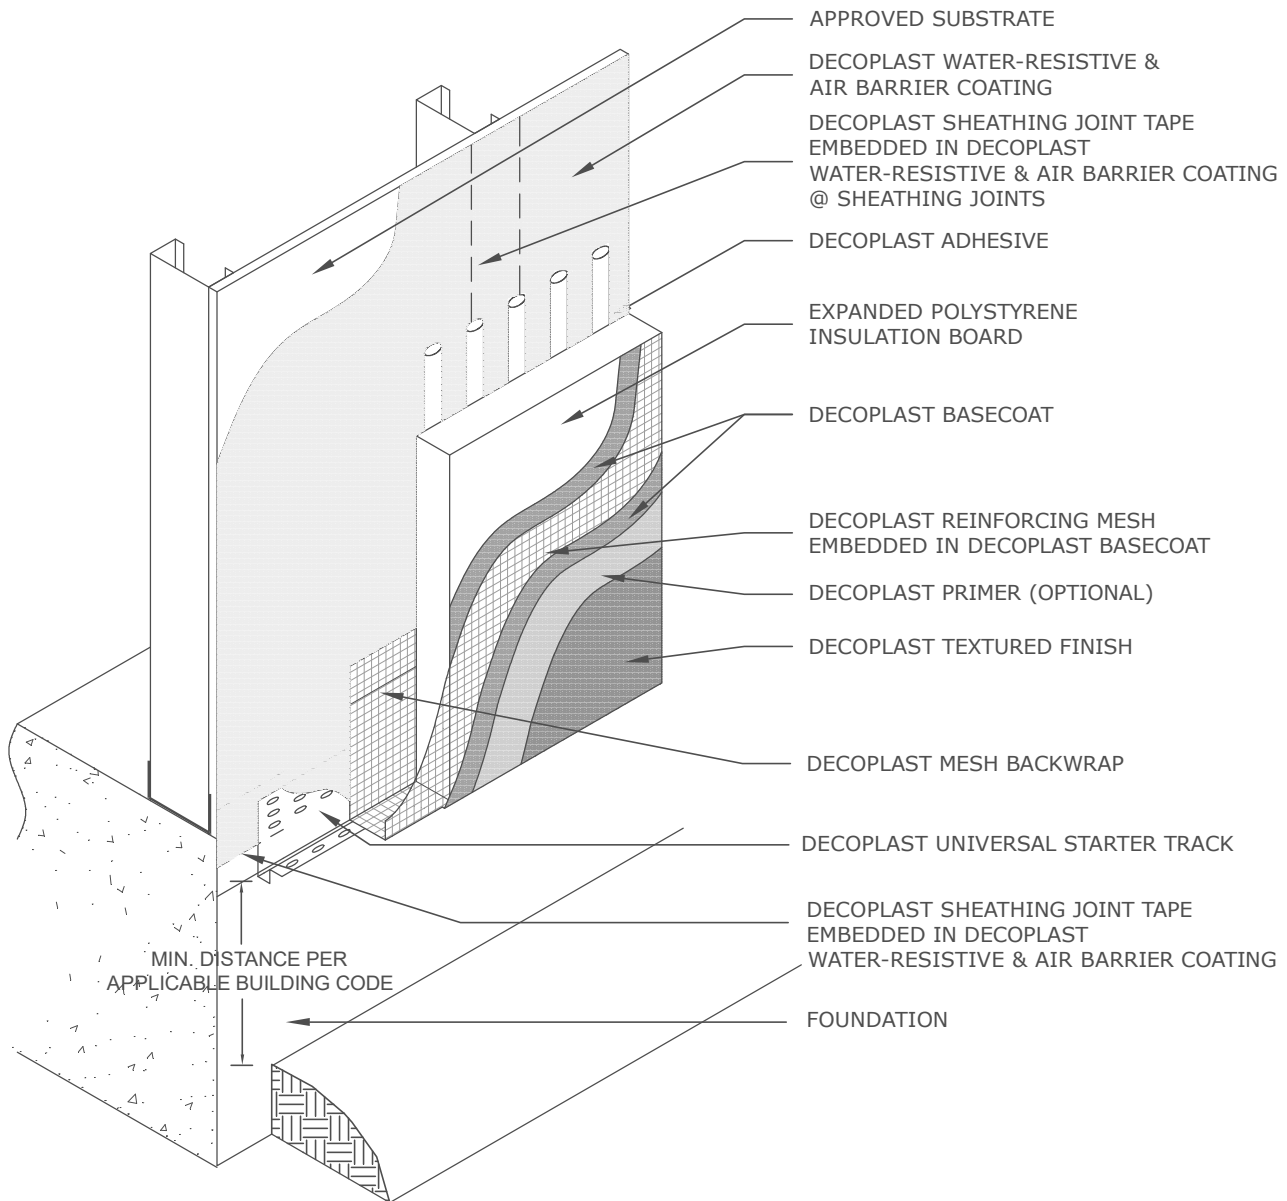


DSWM T1.02 DDARS NOTCHED TERMINATION AT GRADE

DECOPLAST DDARS NOTCHED - 6/1/2016

- NOTES:
1. To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.
 2. Sawn dimension lumber floor joists may require an expansion joint at the dissimilar substrate transition.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

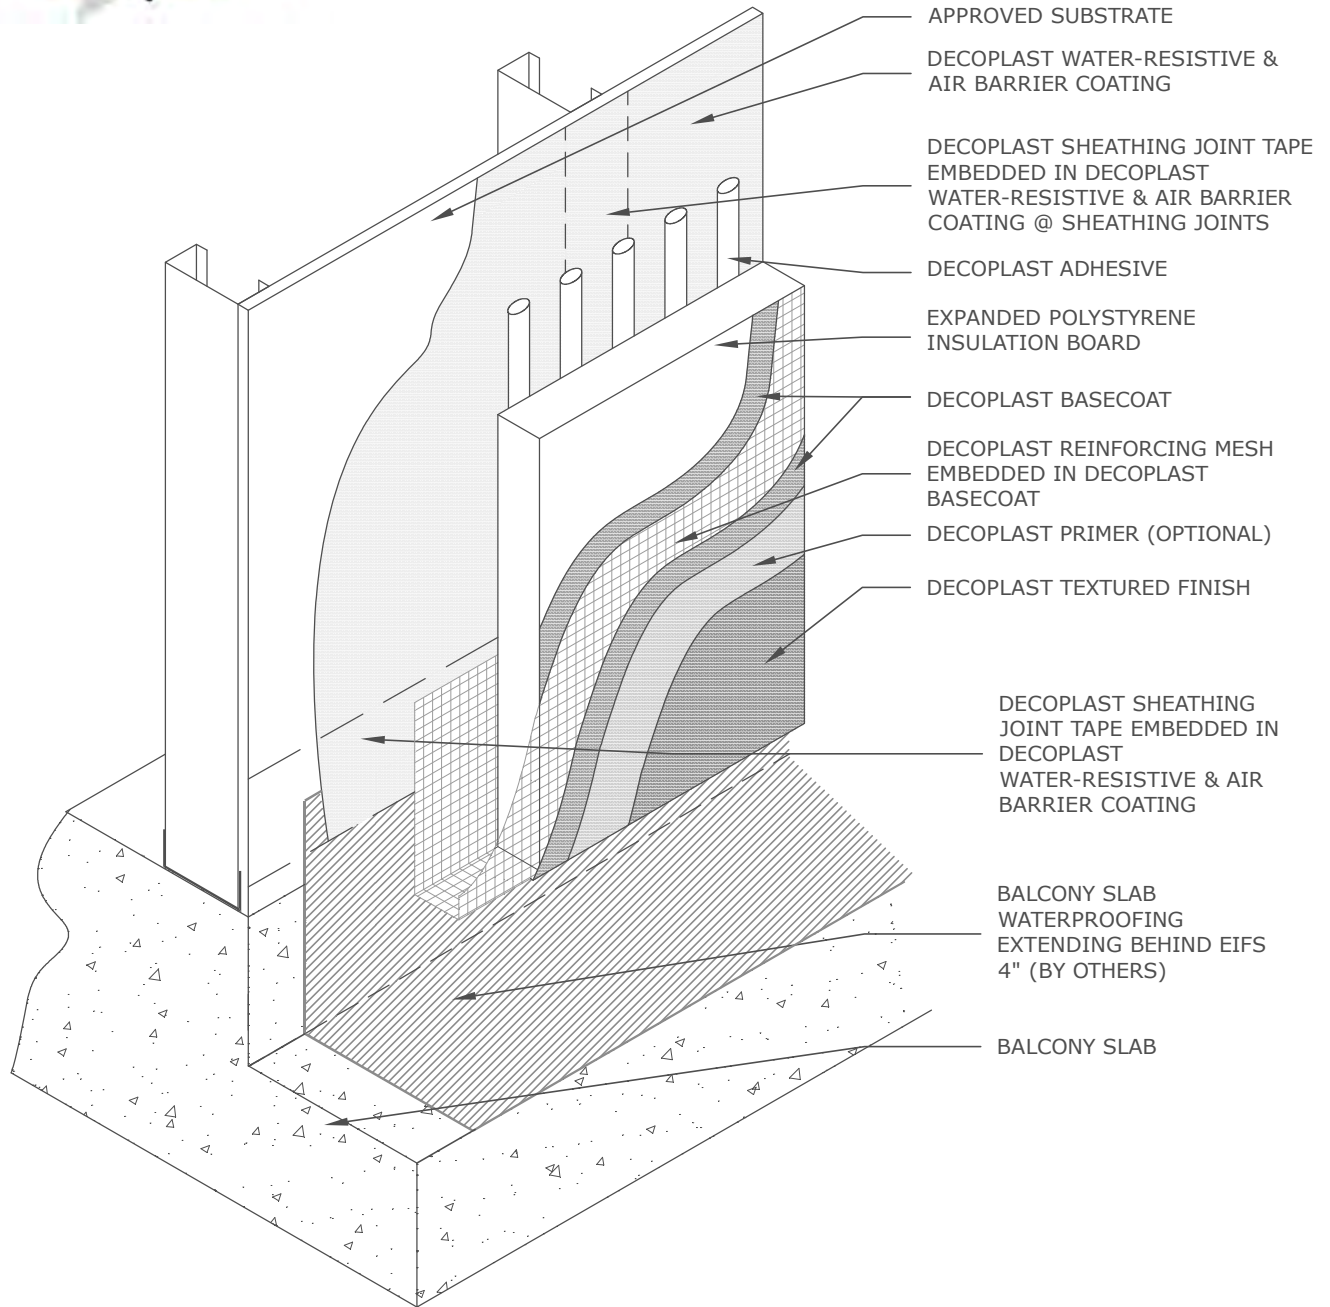


DSWM T1.05 DDARS NOTCHED TERMINATION AT BALCONY SLAB

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

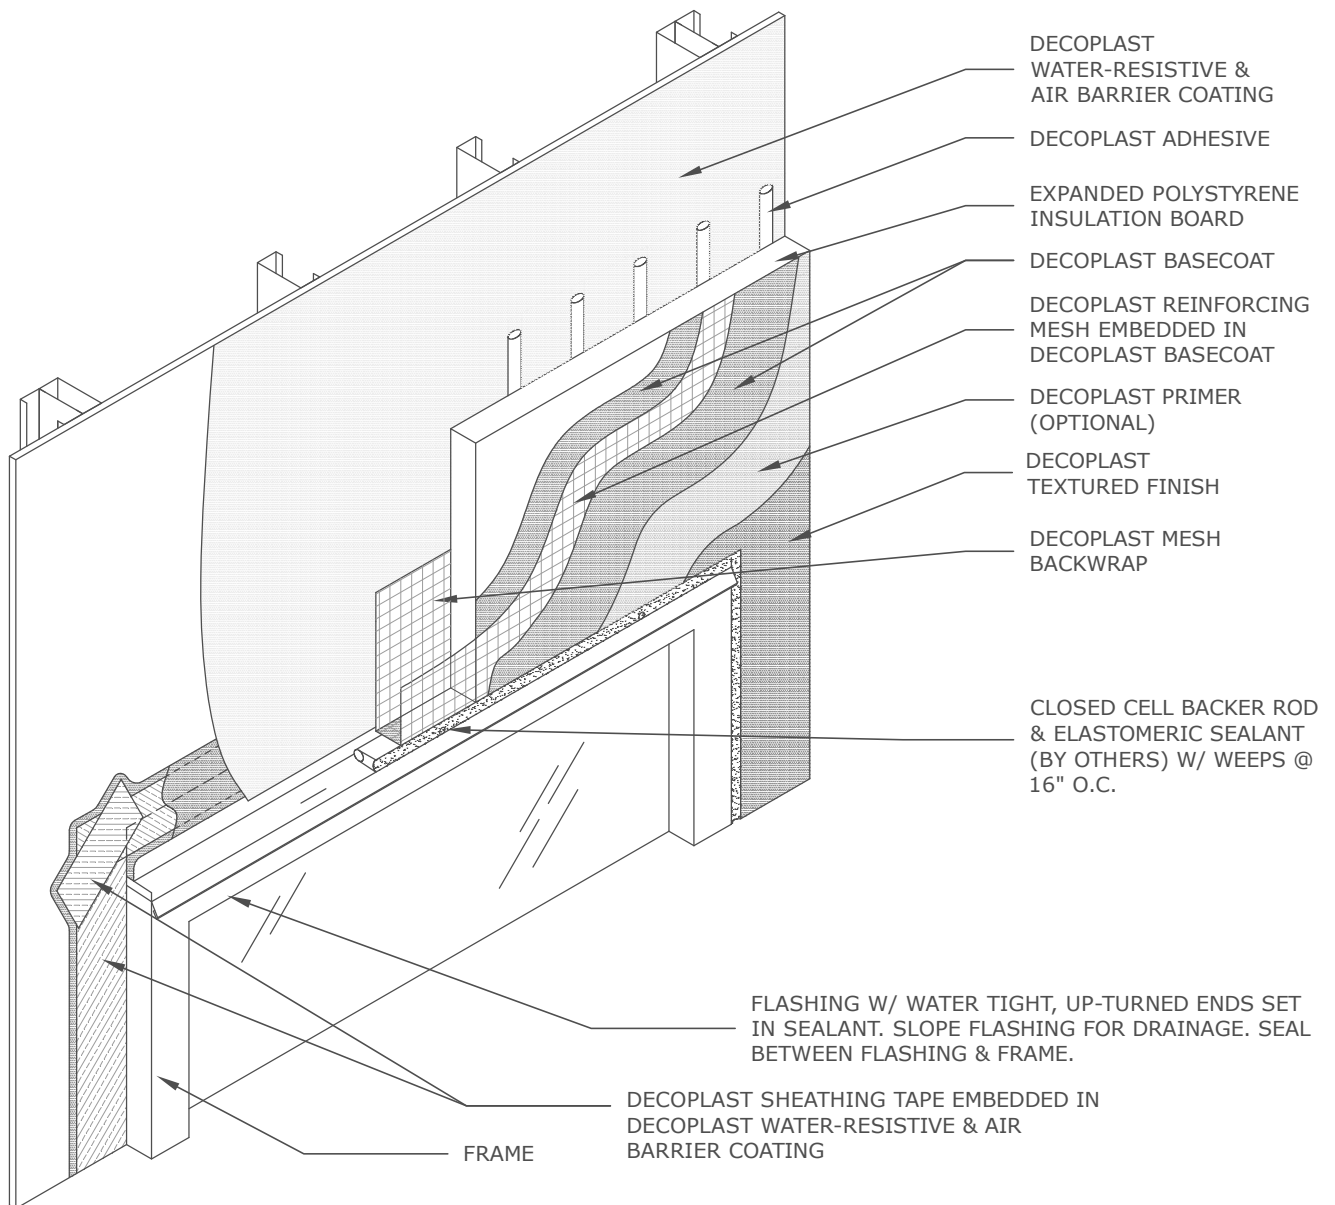


DSWM W1.01 DDARS NOTCHED HEAD ASSEMBLY (WINDOW, DOOR, LOUVER VENTS, ETC.)

DECOPLAST DDARS NOTCHED - 6/1/2016

- NOTES:
1. To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.
 2. Do not use plastic window head flashing.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

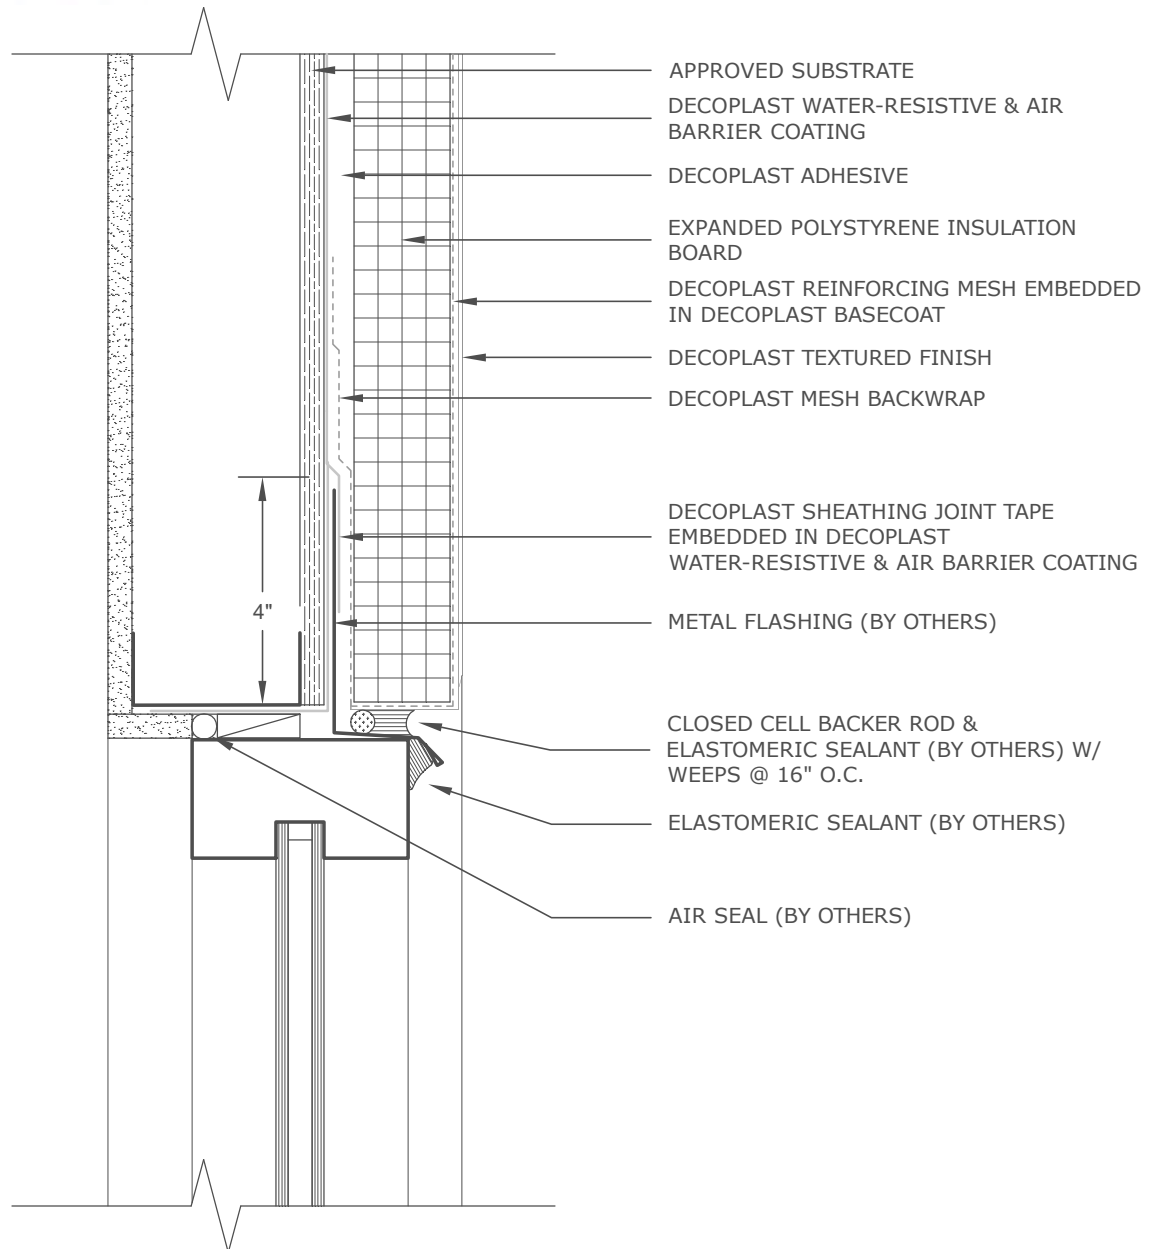


DSWM W1.02A DDARS NOTCHED TERMINATION AT WINDOW HEAD

DECOPLAST DDARS NOTCHED - 6/1/2016

- NOTES:
1. To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.
 2. Do not use plastic track at head terminations.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

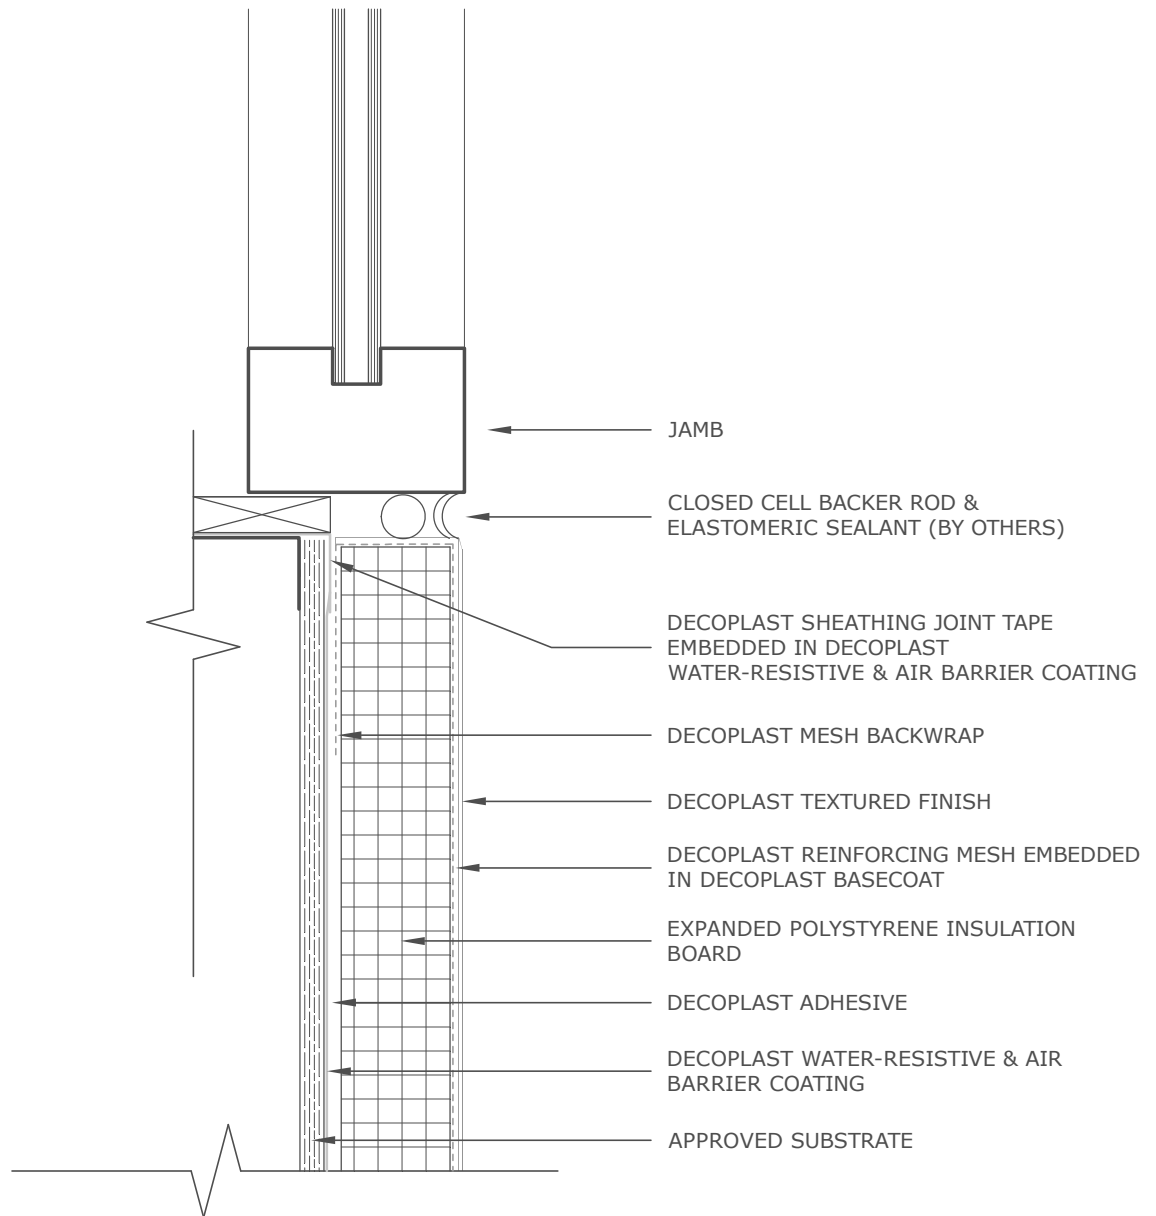

DSWM W1.04 DDARS NOTCHED TERMINATION AT WINDOW JAMB

DECOPLAST DDARS NOTCHED - 6/1/2016

NOTE: To ensure a continuous air barrier across the building envelope, a continuous air seal should be made at each substrate change, joints/gaps, penetrations and dissimilar material terminations. These must be a consideration of the designer in the overall wall assembly design.

Disclaimer: The design, specifications, and construction shall comply with all local building codes and standards. Decoplast installation guidelines are for general information and guidance only and Decoplast specifically disclaims any liability for the use of this design, and for design, engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Decoplast are shown for clarity of the Decoplast product only. Contact the manufacturer of such other products for installation instructions.

Decoplast Liquid Weather Resistive Barrier

Decoplast Liquid Weather Resistive Barrier—Smooth



TECHNICAL DATA

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULTS
Tensile Bond	ASTM E2568-09e1 ASTM C297/297M-04(2010)	Min. 15 psi (103kPa)	Substrate Minimum 20psi; 139 kPa Liquid Weather Barrier Flashing Minimum 70psi; 485 kPa
Water Resistance	ASTM E2568-09e1 ASTM D2247-11	14 Day exposure	Pass
Water Vapor Transmission	ASTM E2570 Reference E96	Vapor Permeable	11.3 perms
Air Leakage	ASTM E283		.02 L/Min./m2
Water Penetration	ASTM E331	No water penetration beyond the inner most plane of the wall after 15 min @ 2.86psf	Pass
Air Permeance	ASTM E2178-11		<0.02 L/s/m ² @ 75Pa
Puncture Resistance	Lab Test	N/A	31.5 lbs
Racking	ASTM E72	No cracking; net deflection 1/8"	Pass
Transverse Load	ASTM E1233 AC-212	10 cycles	Pass
Tensile Bond	ASTM C297 ASTM E2134		Pass
Structural Performance	ASTM E1233 Proc A	10 cycles	Pass
Flame Propagation	NFPA-285		Pass; UL Certified
Radiant Heat Ignition	NFPA-268	No Flame Spread / Ignition	Pass
VOC (g/L)	This product complies with US EPA, South Coast AQMD and Greenseal Standard VOC emission standards for architectural coatings. VOC less than 3 g/L.		
% Solids (by volume)	Calculated		65%

Decoplast Liquid Weather Resistive Barrier is a one-component, fluid-applied vapor permeable air/water-resistive barrier. It is applied directly to vertical, above-grade approved wall substrates and provides an excellent waterproof air barrier when combined with Decoplast joint and rough opening treatment. Available with or without aggregate.

Coverages per pail:

Glass-Mat Gypsum Sheathing:

420-520 ft² (39-48.3 m²)

Exterior Gypsum:

420-520ft² (39-48.3m²)

Cement Board:

450-600 ft² (41.8-55.7 m²)

Poured Concrete:

450-600 ft² (41.8-55.7m²)

Plywood*:

135-175 ft² (12.5-16.3m²)

OSB*:

135-175ft² (12.5-16.3 m²)

CMU Standard Weight*:

225-275 ft² (20.5-25.5 m²)

*Coverage for C-1177 sheathing, cement board, poured concrete is at 10 mils WFT; for Plywood, OSB and CMU are at 20 mils WFT.

When used with Decoplast Sheathing Joint Tape to treat the sheathing joints and rough openings: (coverage may vary based on condition)

0'-4" Sheathing Fabric

625 ft (190.5m) / pail

0'-6" Sheathing Fabric

425 ft (129.5m) / pail

0'-9" Sheathing Fabric

285 ft (87m) / pail

Packaging

5 gallon (19L) 52.5 lbs / 23.8 kg per pail

Shelf Life

24 months, if properly stored and sealed.

Storage

Store Liquid Weather Resistive Barrier in a cool, dry place protected from freezing. Store at no less than 4°C (40°F). Protect from



Decoplast Liquid Weather Resistive Barrier

Decoplast Liquid Weather Resistive Barrier—Smooth

FEATURES	BENEFITS
Waterproof	Possible water damage minimized with repair and restoration costs associated
Vapor Permeable	Condensation risk in wall minimized from water vapor diffusion
Structural	No air leakage between sheathing and Decoplast WRB; rigid/stable under air pressure loads; does not tear or blow off the wall with wind
Resists UV Degradation / Added Durability	180 day exposure rating during construction.
Low VOC formulation	Safe, non-toxic; VOC compliant
Safe Installation	Low VOC, non-flammable as applied. Easy, fast installation; does not require specialized spray equipment or highly skilled labor

SURFACE PREPARATION

Substrate shall be dry, clean, sound and free of release agents, paint or other residue or coatings. Damaged sheathing must be removed and replaced.

Avoid application over irregular surfaces.

Substrate to be coated must be continuous without joints, holes, etc. exceeding 1/32" (0.8 mm) in size. Sheathing must be properly installed as required by applicable building codes or sheathing manufacturer.

MIXING

Mix with a clean, rust-free electric drill and paddle until thoroughly blended.

DILUTION OF DECOPLAST LIQUID WEATHER RESISTIVE BARRIER IS NOT RECOMMENDED



Decoplast Liquid Weather Resistive Barrier

Decoplast Liquid Weather Resistive Barrier—Smooth

APPLICATION

Clean, dry, properly prepared, frost-free surfaces are needed for application. Decoplast joint and rough opening treatment required for sheathing joints, inside and outside. Spot fasteners, knots or other voids in sheathing surface. Pre-spot all fasteners with Decoplast Liquid Weather Resistive Barrier if using Decoplast Sheathing Fabric including all other voids and spot surface defects such as overdriven fasteners, knots and voids.

Gypsum Sheathing, Glass-Mat Gypsum Sheathing, Exterior Plywood / Exterior: Apply Decoplast Liquid Weather Resistive Barrier to prepared substrate using spray equipment that can support a minimum 1 Gallon per minute (GPM) and a .031 mil tip at 3000+ psi., or with the appropriate size nap roller in a single, uniform coating at a wet thickness of 10 mils. Application over Glass-Mat Gypsum Sheathing, plywood and exterior gypsum sheathing: use a 1/2" (13 mm) nap roller.

Oriented Strand Board (OSB): A two-coat application of Decoplast Liquid Weather Resistive Barrier is required over OSB. The first coat is applied over the prepared substrate prior to treating sheathing joints, rough openings, and corners. Apply Decoplast Liquid Weather Resistive Barrier by spray or roller with a 1/2" (13mm) nap roller in a single, uniform coating at a wet thickness of 10 mils and allow drying. For air barrier, sheathing joints, rough openings, and corners must then be covered with Decoplast joint treatment. Substrate to receive the second coat of Decoplast Liquid Weather Resistive Barrier must be continuous without joints, holes, etc. exceeding 1/32" (0.8 mm) in size. The second coat of Decoplast Liquid Weather Resistive Barrier must be applied over the treated surface in a single, uniform coating to a wet thickness of 10 mils.

Concrete Masonry Wall Construction:

Concrete masonry wall construction must be structurally sound, clean, dry, and free from damage, frost, and all bond-inhibiting material, including dust, dirt, mold, algae, and efflorescence. Repair cracks up to 1/8 inch (3 mm) wide by filling. Rake the crack with a sharp tool to remove loose or friable material, and blow clean with oil-free compressed air. For cracks wider than 1/8" (3 mm) and up to 1/4" (6 mm) wide, use a paintable acrylic latex caulk to fill the crack, tool flush with the surface, and allow drying completely. For moving cracks consult a structural engineer. Protect crack repair materials from rain and freezing until dry.

Air and Moisture Barrier:

Spray-applied over CMU: Apply Decoplast Liquid Weather Resistive Barrier uniformly with suitable spray equipment. Backroll to fill the surface and allow drying. Apply a second uniform coat of Decoplast Liquid Weather Resistive Barrier and back-roll to achieve void / pinhole free surface. Depending on the condition of the surface, a minimum of 10 wet mils up to a maximum of 30 wet mils per coat is required. Apply additional coats if needed to achieve a VOID / PINHOLE FREE surface.

Roller-applied over CMU: Apply Decoplast Liquid Weather Resistive Barrier uniformly with a 3/4 inch (19 mm) nap roller and allow drying. Apply a second uniform coat of Decoplast Liquid Weather Resistive Barrier to achieve a void and pinhole free surface. Depending on the condition of the surface a minimum of 10 wet mils up to a maximum of 30 wet mils per coat is required. Apply additional coats if needed to achieve a VOID AND PINHOLE FREE surface.

IMPORTANT NOTE: Decoplast Liquid Weather Resistive Barrier functions as a waterproof air barrier on normal weight concrete masonry unit wall construction with flush (struck flush with the surface of the CMU) or concave joints when a minimum of two liberal coats are applied. Additional coats may be necessary depending on the condition of the CMU wall surface, CMU porosity, joint profile, and other variables that may exist. For "rough" CMU wall surfaces, skim coat the entire surface with Decoplast cementitious leveler before application of Decoplast Liquid Weather Resistive Barrier. A VOID AND PINHOLE FREE SURFACE must be achieved for Decoplast Liquid Weather Resistive Barrier to properly function as a waterproof air barrier on CMU wall surfaces.

Curing/Drying

Decoplast Liquid Weather Resistive Barrier is dry to touch and can be over coated within 2-4 hours under normal conditions [70°F (21°C), 50% RH]. Wait 24 hours before adhesive attachment of Decoplast insulation board. Final drying varies depending on temperature / humidity and surface conditions. Protect from rain and freezing until completely dry.

Material Storage

Keep containers covered to protect from skinning. If skin forms, remove the skinned material from container; remaining material is unaffected by skinned material.

Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Decoplast Liquid Weather Resistive Barrier

Decoplast Liquid Weather Resistive Barrier—Smooth



LIMITATIONS

- Apply only when the surface and ambient temperatures are above 40°F (4°C) and below 100°F (38°C) during application and drying period.
- Not recommended for use when cool, damp conditions exist for prolonged periods. Cool, damp conditions retard drying and may require extended periods of protection.
- Do not use on damp surfaces, below grade, or on surfaces subject to water immersion.
- Not recommended for use over fire-retardant treated or pressure treated plywood substrates.
- Not recommended for spanning sheathing joints or holes in excess of 1/8" (3 mm) wide.
- Contact Decoplast Technical Service for additional information regarding coverage over different brands.
- Ventilate temporary heaters to the exterior to prevent water vapor from accumulating on or within the wall assembly materials.
- Decoplast Liquid Weather Resistive Barrier can be left exposed to weather for up to 6 months of installation to protect the substrate.
- When Decoplast Liquid Weather Resistive Barrier is used in conjunction with Decoplast Continuous Insulation Systems ensure the Decoplast Liquid Weather Resistive Barrier surface is clean, dry, and free of surface contamination. Install Decoplast Continuous Insulation System Board within 30 days of the application of Decoplast Liquid Weather Resistive Barrier, or clean the surface and recoat with Decoplast Liquid Weather Resistive Barrier.
- For Portland cement stucco and similarly constructed wall assemblies over metal lath contact Decoplast Technical Service.

HEALTH AND SAFETY

Health Precaution

As with any chemical construction product, exercise care when handling. Product is water-based.

WARNING!

Causes eye and skin irritation.

Precaution Measures:

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

First Aid:

Eye Contact: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eyelids with fingers. Get immediate medical attention.

Skin Contact: Immediately wash skin with plenty of soap and water for 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Seek immediate medical attention.

Ingestion: If swallowed, do NOT induce vomiting. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person.

Spills

Contain and collect with a suitable absorbent material such as cotton rags.

Disposal

Dispose of in accordance with local, state or federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty. Refer to Decoplast Specifications for more complete information on proper use and handling of this product.



This product is intended for use by qualified professional contractors. All information conforms to the standard detail recommendations and specifications for the installation of Decoplast systems and is presented in good faith as of the date of publication of this document. GREENMAKER INDUSTRIES ASSUMES NO LIABILITY, EXPRESSED OR IMPLIED, AS TO THE WORKMANSHIP, ENGINEERING OR ARCHITECTURE OF ANY PROJECT. For more information regarding this product or additional Decoplast products, please contact a Decoplast Representative at (860) 761-2830 or visit our website www.Decoplast.com.

Decoplast Sheathing Fabric



TECHNICAL CHARACTERISTICS

MD Yarn	500 Denier H.T. Polyester
CD Yarn	500 Denier H.T. Polyester
Pattern	5 x 5 yarns/inch
Tensile	50 x 45 yarns/inch
Weight	2.13 oz/yd ²
Coating	F.R. PVC
Substrate	1 layer of 0.5 oz/yd ² Spunbond Polyester

Decoplast Sheathing Fabric is a cost-effective reinforcing fabric made by chemically bonding continuous filament yarn in an open mesh construction. It is commonly used to increase tear or puncture resistance, improve dimensional stability, or aid in processing. The utility of Decoplast Sheathing Fabric can be further enhanced by the use of functional binders for increased chemical, tear or moisture resistance, for proper chemical compatibility with the construction they are reinforcing, or for providing the adhesive properties needed for laminations.

PROPERTIES

Excellent Dimensional Stability

Tensile Strength

Increased Tear Resistance

Storage

Store off the ground in a dry area with adequate ventilation. Protect from extreme heat 130°F, moisture and direct sunlight.

HEALTH AND SAFETY

Health Precaution

As with any chemical construction product, exercise care when handling.

Safety Precaution

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

First Aid:

EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Contact a physician.

SKIN CONTACT: Immediately wash skin with plenty of soap and water for 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists. **Inhalation:** Move to fresh air. If symptoms persist, call a physician.

INGESTION: Accidental ingestion of this material is unlikely. If this does occur, watch person for several days to make sure intestinal blockage does not occur. Rinse mouth with water and drink water to remove fibers from the throat. If symptoms persist, call a physician.

Disposal

Dispose of in accordance with local, state or federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty. Refer to Decoplast Specifications for more complete information on proper use and handling of this product.



This product is intended for use by qualified professional contractors. All information conforms to the standard detail recommendations and specifications for the installation of Decoplast systems and is presented in good faith as of the date of publication of this document. GREENMAKER INDUSTRIES ASSUMES NO LIABILITY, EXPRESSED OR IMPLIED, AS TO THE WORKMANSHIP, ENGINEERING OR ARCHITECTURE OF ANY PROJECT. For more information regarding this product or additional Decoplast products, please contact a Decoplast Representative at (860) 761-2830 or visit our website www.Decoplast.com.

**DECOSHIELD ADHESIVE BACKED PRIMERLESS FLASHING TAPE****With SUPERSTICK TECHNOLOGY**

A high-performance rough opening and flashing tape designed for use with EIFS and Stucco systems to seal around penetrations, window, door openings and flanges and sheathing joints. Can be applied to most substrates without the use of primer or mechanical fasteners. The polyester fabric top layer provides excellent bonding surface for cementitious and synthetic coatings.

AIR/WATER RESISTIVE BARRIER COMPONENTS – FLASHING TAPE**FEATURES AND BENEFITS**

- 30-day exposure rating
- Fully adhered system
- No Primer needed
- Antimicrobial coated fabric
- Split release liner for easy application
- Can be applied to damp surfaces
- Sticks to substrates at -20°F
- No VOC's, HFCC's, nor CFC's
- Compatible with and will adhere to most construction surfaces, wood, concrete, CMU Block, OSB, Plywood, glass mat exterior sheathing products, foam insulation board, ICF, metal, TPO and EPDM
- Forms a positive air/moisture barrier

TECHNICAL DATA

Properties	Test Method	Test Results
Color		White
Thickness		17 mil
Self-Sealing Ability	ASTM D1970 Section 7.9	Pass
Moisture Vapor Transmission	ASTM E96	Wet Cup 0.270 Perms Dry Cup 0.296 Perms
Cold Temperature Flexibility	ASTM C765-73	Passes
Grab Tensile	ASTM D5034	Warp 67 lbs / Weft 57 lbs
Tensile Elongation at Max load	ASTM D5034	Warp 16% / Weft 107%
Mixed fungal assessment	ASTM G21	No growth at 28 days
In-Service Temperature		-45°F/-42°C to 300°F/148.9°C
Installation Temperature		-20°F/-28°C to 125°F/51.6°C*
Solubility to Water		Insoluble
UV Stability		30 days

PACKAGING

Roll Width: 4, 6, 12"

Roll Length: 75'

USES

Used as a sealing tape for sheathing joints and around penetrations in Stucco and EIFS systems. Safe for use on all window and door flanges and most commonly used construction substrates.

LIMITATIONS

Not recommended to be exposed for more than 30 days.

Not recommend to be applied over uncured (wet) sealants or adhesives, even if compatible

Not recommended for use on substrates with standing water or visibly wet surfaces, dirty surfaces, frozen surfaces, or surfaces contaminated with foreign substances such as grease, oil or solvents.

Not recommended for use when in direct contact with PVC type roofing membranes.

*Note: **DECOSHIELD Adhesive Backed Primerless Flashing Tape** can be applied in extreme cold/hot weather; however, we do not recommend applying product below 0°F (-17°C) or above 125°F (51.6°C) due to health and safety reasons.

SHELF LIFE

Maintains optimum initial adhesion to substrates when used within twenty-four months from the date of manufacture.

STORAGE

Should be stored in the original, unopened container at ambient temperatures between 40°F to 90°F (5°C to 32°C). Storage area should remain dry and out of direct sunlight. Do not remove materials from original containers until ready for use. Do not double stack pallets.

PREPARATION

All surfaces shall be clean, dry and free of any foreign materials. The surface shall be free of gaps, sharp edges, and protrusions.

Metal surfaces may need to be solvent wiped and/or abraded to achieve optimum adhesion. Recommend testing substrates for adhesion prior to full application.

APPLICATION

Joint/seam applications: care should be taken to apply flashing tape to form water- shedding laps. Cut the flashing tape to length, remove a small portion of the release liner and apply to the substrate, continue to remove the release liner as you firmly roll into place using a "J" roller or hand roller to smooth out any wrinkles, air bubbles or creases. End laps should be a minimum 6" and should be firmly rolled to ensure adequate adhesion.

When applying to exterior gypsum products (i.e. Dens Glass Gold) primer is not needed, provided the surface is clean, dry, and free of any contaminants and is firmly rolled to ensure full adhesion.

CLEAN UP

Dispose of waste in accordance to local requirements. Control worksite so that boxes, packaging and release liner do not present a hazard.

Boxes, packaging materials and release liner can be recycled.

CAUTION

Decoshield Adhesive Backed Primerless Flashing Tape has an aggressive adhesive, we recommend removing 3" to 6" of the release liner at a time while installing to help prevent the tape from sticking to itself.

PVC and TPO type roofing membranes may contain high concentrations of plasticizers that may react with the adhesive and is not recommended to be applied over these substrates.

Do not adhere Flashing Tape to skin, removal may cause loss of hair and/or bleeding.

The use of safety glasses and gloves is recommended.



697 Oakwood Ave
West Hartford, CT 06110
860-761-2830

This product is intended for use by qualified professional contractors. All information conforms to the standard detail recommendations and specifications for the installation of Decoplast Wall Systems and is presented in good faith as of the date of publication of this document. GREENMAKER INDUSTRIES ASSUMES NO LIABILITY, EXPRESSED OR IMPLIED, AS TO THE WORKMANSHIP, ENGINEERING or ARCHITECTURE OF ANY PROJECT. For more information regarding this product or additional Decoplast Wall Systems products, please contact a DECOPLAST Wall Systems Representative at (860) 761-2830 or visit our website www.dcoplast.co



EPS Foam Board (Expanded Polystyrene) Ci

Expanded Polystyrene (EPS) Foam Boards are an integral part of an EIFS system. Available in various thicknesses, flat or grooved, EPS Foam Boards provide insulative qualities as well as drainage capabilities for moisture release systems.

EPS INSULATION BOARD PROPERTIES

Meets or exceeds physical and thermal property standards as established in ASTM C 578-19 Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation

Physical Properties	Type I	Type II
Compressive Resistance at 10% Strain Deformation (2" cube)	10.0 psi	15.0 psi
Flexural Strength	25.0 psi	35.0 psi
Thermal Resistance (R-Value)* 75 ± 2° F (24 ± 1° C); 40 ± 2° F (4.4 ± 1° C)	3.85 Min R / 1" Thickness 4.17	4.17 Min R / 1" Thickness 4.55
Thermal Conductivity (K-Value)* 75 ± 2° F (24 ± 1° C) 40 ± 2° F (4.4 ± 1° C)	0.260 BTU/(hr) (Sq.Ft.) (F/in.) 0.240 BTU/(hr) (Sq.Ft.) (F/in.)	0.240 BTU/(hr) (Sq.Ft.) (F/in.) 0.220 BTU/(hr) (Sq.Ft.) (F/in.)
Coefficient of Thermal Expansion	0.000035 in/(in)/(F)	0.000035 in/(in)/(F)
Moisture Resistance Water Vapor Permeability of 1" (25.4 mm) thickness max perm	4.0 % by Volume 5 Max perm	3.0 % by Volume 3.5 Max perm
Oxygen Index	24.0 Min volume %	24.0 Min volume %
Dimensional Stability (Change in dimensions)	2.0 Max %	2.0 Max %
Max. Service Temperature Long Term / Intermittent	167 / 180 F	167 / 180 F
Flame Spread Smoke Developed	15 @ 6"; 95-125	5 @ 4"; 2-235
Density, min / Density, nominal Min lb/ft ³ Nominal lb/ft ³	0.90 1.0	1.35 1.5



697 Oakwood Ave
West Hartford, CT 06110
860-761-2830

This product is intended for use by qualified professional contractors. All information conforms to the standard detail recommendations and specifications for the installation of DECOPLAST Wall Systems and is presented in good faith as of the date of publication of this document. GREENMAKER INDUSTRIES ASSUMES NO LIABILITY, EXPRESSED OR IMPLIED, AS TO THE WORKMANSHIP, ENGINEERING OR ARCHITECTURE OF ANY PROJECT. For more information regarding this product or additional Decoplast Wall Systems products, please contact a DECOPLAST Wall Systems Representative at (860) 761-2830 or visit our website www.decoplast.com.

Decoplast Dry Base Coat / Adhesive Premium



TECHNICAL DATA

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULTS
Surface Burning	ASTM E-84	< 25 Flame Spread < 450 Smoke Developed	Pass Pass
Adhesion (psi)	ASTM C-297	28 days	> 20 Gypsum Sheathing > 15 EPS Board > 80 Concrete Block > 35 Dens-Glass® Gold

Decoplast Dry Base Coat / Adhesive Premium is a one component, polymer-modified, cement based, dry powder material used as an adhesive and base coat used in the Decoplast Continuous Insulation Systems.

Coverage

75 – 100 ft² (6.9-9.29 m²) per bag, used for both adhesive and base coat applications.

Adhesive over sheathing and smooth masonry:

200-240 ft² (18.6-22.3 m²) per bag, application with U-notched trowel having 1-1/2" (38 mm) spread between notches; 3/8" x 1/2" notch.

Adhesive over rough or uneven masonry:

95-115 ft² (8.8-11.1 m²) per bag, application with U-notched trowel having 1-1/2" (38 mm) spread between notches; 3/8" x 1/2" x 1/2" notch.

Skim coat:

90-135 ft² (8.4-12.5 m²) per bag

Coverages may vary depending on application technique and surface conditions.

Packaging

50 lb. bag (23 kg).

Shelf Life

24 months, if unopened, properly stored and protected from moisture.

Storage

Store off the ground in a dry area. Protect from extreme heat [90°F (32°C)], moisture and direct sunlight.

FEATURES

BENEFITS

One-component	Ready to use; easily mixed with water on the job site
Polymer-modified	Excellent adhesion; increases durability and freeze/thaw resistance
Smooth consistency	Trowels on easily; increases productivity
Vapor permeable	Allows substrate to breathe naturally; resists blistering due to vapor
Factory blended Portland Cement	Assures performance mix ratio
Low cement ratio	Less alkalinity, less free lime, less efflorescence
Bagged powder product	Less solid waste

SURFACE PREPARATION

Adhesive Preparation:

Ensure surface is clean, dry and free of surface contamination. Install insulation board with adhesive within 30 days of the application of **Decoplast Weather-Resistive Barrier** or clean the surface and recoat with **Decoplast Weather-Resistive Barrier**.

Concrete / Masonry

Surfaces must be clean, dry and free of frost, damage and all bond inhibiting materials, including dirt, efflorescence, laitance, form oil and other foreign matter. Loose or damaged material must be removed by water blasting, sandblasting or mechanical wire brushing and repaired. Avoid application over irregular surfaces. Resurface, patch or level surfaces to required tolerance and smoothness with appropriate Decoplast leveling materials.

ASTM C 1177— Glass Mat Gypsum Sheathing

Ensure surface is clean, dry and free of surface contamination. Sheathing must be installed and protected in accordance with manufacturer's and building code requirements. Remove and replace weather damaged sheathing. Avoid application over irregular, out of plane surfaces. Install insulation board with adhesive within 30 days of installation of the sheathing.

Base Coat Preparation:

Insulation board must be rasped and free of all bond inhibiting materials.

Concrete or Masonry

Surfaces must be clean, dry and free of frost, damage and all bond inhibiting materials, including dirt, efflorescence, laitance, form oil and other foreign matter. Loose or damaged material must be removed by water blasting, sandblasting or mechanical wire brushing and repaired.

Decoplast Dry Base Coat / Adhesive Premium



MIXING

Use 5-6.5 quarts (4.7-6.2 L) of clean, potable water per 50 lb. (23 kg) bag of Decoplast Dry Base Coat. Mix with a clean, rust-free electric drill and paddle. Allow to set approximately five minutes, adjust mix if necessary by adding up to 12 fl.oz. (0.35 L) of water per bag, remix to a uniform consistency. Avoid re-tempering after mixing of product. Do not exceed maximum amount of water in mix ratio.

APPLICATION

Apply only to sound and clean, dry, properly prepared, frost-free surfaces.

As an Adhesive:

Apply to the back of the insulation board with the appropriate size notched trowel. Form uniform ribbons of adhesive parallel to the short dimension of the board so the ribbons are oriented vertically in relation to the plane of the wall. Immediately install the board horizontally with staggered joints and apply firm uniform pressure over the entire board surface. Do not delay installation once adhesive is applied.

As a Base Coat:

Apply with a stainless steel trowel to an approximate thickness of 1/8" (3 mm). Work horizontally or vertically in strips of 40" (1 m) and immediately embed Decoplast Reinforcing Mesh in wet base coat by troweling from the center to the edges of the mesh. Avoid wrinkles in the mesh and smooth the base coat to eliminate trowel marks. Minimum recommended dry thickness of the reinforced base coat is 1/16" (1.6 mm) when dry. Reapply additional base coat if necessary to achieve minimum thickness as soon as the first application is dry. Embedded mesh in base coat should not be visible.

As a Skim Coat:

Apply in one application to a maximum thickness of 1/16" (1.6 mm) to the prepared surface and smooth the surface.

Curing/Drying

Dries within 24 hours under normal drying conditions [70°F (21°C), 50% RH]. Allow additional drying time during cold, humid, or wet weather until insulation board is fully adhered before rasping, and before application of primer or finish to hardened Decoplast Dry Base Coat. Protect from rain, freezing and continuous high humidity until completely dry. Decoplast recommends using Decoplast Primer prior to application of finish.

Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

LIMITATIONS

Use Decoplast Dry Base Coat only when surface and ambient temperatures are above 40°F (4°C) during application and drying period.

Sloped surfaces: Refer to Decoplast details.

Decoplast Dry Base Coat should not be used on weather-exposed horizontal or below grade surfaces or where immersion in water may occur.

Prevent rapid loss of moisture from exposure to direct sun, wind and high temperatures.

Decoplast Dry Base Coat should not be used as a finish coating.

HEALTH AND SAFETY

Health Precaution

Contains Portland cement and crystalline-free silica. Avoid breathing dust. As with any chemical construction product, exercise care when handling.

DANGER!

Causes serious eye damage and/or skin irritation. May cause an allergic skin reaction, respiratory irritation, drowsiness or dizziness.

Safety Precaution

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

First Aid:

EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eye lids with fingers. Get immediate medical attention.

SKIN CONTACT: Immediately wash skin with plenty of soap and water for at least 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

INHALATION: If inhaled, remove to fresh air. If not breathing give artificial respiration or give oxygen by trained personnel. Seek medical attention immediately.

INGESTION: If swallowed, do NOT induce vomiting. Call a physician or a poison control center immediately. Never give anything by mouth to an unconscious person.

Spills

Contain and collect in an appropriate container. Uncured material may be removed with water.

Disposal

Dispose of in accordance with local, state or federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty. Refer to Decoplast Specifications for more complete information on proper use and handling of this product.

Decoplast Liquid Base Coat / Adhesive



TECHNICAL DATA

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULTS
Surface Burning	ASTM E-84	< 25 Flame Spread	Pass
		< 450 Smoke Developed	Pass
Adhesion (psi)	ASTM C-297	28 days	> 20 Gypsum Sheathing
			> 15 EPS Board
			> 60 Concrete Block
			> 25 Dens-Glass® Gold
NFPA—285			UL Classified

Decoplast Liquid Base Coat / Adhesive is a 100% acrylic polymer used as an adhesive and base coat combined with Portland Cement. Liquid Base Coat / Adhesive is used in the Decoplast Continuous Insulation Systems. It is a two component product.

Coverage

100-125 ft² (9.3-11.6 m²) per pail, when used for both adhesive and base coat applications.

FEATURES

BENEFITS

Polymer-modified	Excellent adhesion; increases durability and freeze/thaw resistance
Smooth consistency	Trowels on easily; increases productivity
Vapor Permeable	Use as an adhesive, base coat and leveling coat

Adhesive over sheathing and smooth masonry: 200-250 ft² (18.6-23.2 m²) per pail, application with U-notched trowel having 1-1/2" (38.1mm) spread between notches; 3/8" x 1/2" notch.

As an adhesive over rough or uneven masonry: Coverage will vary based on surface condition of masonry.

SURFACE PREPARATION

Adhesive Preparation:

Decoplast Liquid Weather Resistive Barrier: ensure surface is clean, dry and free of surface contamination. Install insulation board with adhesive within 30 days of the application of Decoplast Liquid Weather Resistive Barrier, or clean the surface and recoat with Decoplast Liquid Weather Resistive Barrier.

Concrete or Masonry

Surfaces must be clean, dry and free of frost, damage and all bond inhibiting materials, including dirt, efflorescence, laitance, form oil and other foreign matter. Loose or damaged material must be removed by water blasting, sandblasting or mechanical wire brushing and repaired. Avoid application over irregular surfaces. Resurface, patch or level surfaces to required tolerance and smoothness with appropriate Decoplast leveling materials.

Glass Mat Gypsum Sheathing in Compliance with ASTM C 1177

Ensure surface is clean, dry and free of surface contamination. Sheathing must be installed and protected in accordance with manufacturer's and building code requirements. Remove and replace weather damaged sheathing. Avoid application over irregular, out of plane surfaces. Install insulation board with adhesive within 30 days of installation of the sheathing.

As a Base Coat

Insulation Board

Insulation must be rasped and free of all bond inhibiting materials.

Concrete or Masonry

Surfaces must be clean, dry and free of frost, damage and all bond-inhibiting materials, including dirt, efflorescence, laitance, form oil and other foreign matter. Loose or damaged material must be removed by water blasting, sandblasting or mechanical wire brushing and repaired.

As a base coat:

165-250 ft² (15.3-23.2m²) per pail.

As a skim coat:

185-250 ft² (17.2-23.2m²) per pail.

Coverages may vary depending on application technique and surface conditions.

Packaging

5 gal. (19L) pail 62.5 lbs / 28.4 kg per pail

Shelf Life

24 months, if unopened, properly stored and protected from moisture.

Storage

Store off the ground in a dry area. Protect from extreme heat [90°F (32°C)], moisture and direct sunlight.

Decoplast Liquid Base Coat / Adhesive



MIXING

Mix equal parts of Decoplast Liquid Base Coat / Adhesive to Type I/ II Portland cement by weight. Mix with a clean, rust-free electric drill and paddle. Allow to set approximately five minutes, adjust mix if necessary by adding up to 8 fl. oz. (0.24 L) of water, and remix to a uniform consistency. Avoid retempering after mixing of product.

APPLICATION

Apply only to sound and clean, dry, properly prepared, frost-free surfaces.

As an Adhesive:

Apply to the back of the insulation board with the appropriate size notched trowel. Form uniform ribbons of adhesive parallel to the short dimension of the board so the ribbons are oriented vertically in relation to the plane of the wall. Immediately install the board horizontally with staggered joints and apply firm uniform pressure over the entire board surface. Do not delay installation once adhesive is applied.

As a Base Coat:

Apply with a stainless steel trowel to an approximate thickness of 1/8" (3 mm). Work horizontally or vertically in strips of 40" (1 m) and immediately embed Decoplast Reinforcing Mesh in wet base coat by troweling from the center to the edges of the mesh. Avoid wrinkles in the mesh and smooth the base coat to eliminate trowel marks. Minimum recommended dry thickness of the reinforced base coat is 1/16" (1.6 mm) when dry. Reapply additional base coat if necessary to achieve minimum thickness as soon as the first application is dry. Embedded mesh in base coat should not be visible.

As a Skim Coat:

Apply with a stainless steel trowel to a maximum thickness of 1/16" to the prepared surface.

Curing/Drying

Dries within 24 hours under normal drying conditions [70°F (21°C), 50% RH]. Allow additional drying time during cold, humid, or wet weather until insulation board is fully adhered before rasping, and before application of primer or finish to hardened Decoplast Liquid Base Coat. Protect from rain, freezing and continuous high humidity until completely dry. Decoplast recommends using Decoplast Primer prior to application of finish.

Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

LIMITATIONS

Use Decoplast Liquid Base Coat only when surface and ambient temperatures are above 40°F (4°C) during application and drying period.

Sloped surfaces: Refer to Decoplast details.

Decoplast Liquid Base Coat should not be used on weather-exposed horizontal or below grade surfaces or where immersion in water may occur.

Prevent rapid loss of moisture from exposure to direct sun, wind and high temperatures.

Decoplast Liquid Base Coat should not be used as a finish coating.

HEALTH AND SAFETY

Health Precaution

Decoplast Liquid Base Coat is water-based. As with any chemical construction product, exercise care when handling.

WARNING!

Causes eye and skin irritation.

Safety Precaution

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

First Aid:

EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eye lids with fingers. Get immediate medical attention.

SKIN CONTACT: Immediately wash skin with plenty of soap and water for at least 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

INHALATION: If inhaled, remove to fresh air. If not breathing give artificial respiration or give oxygen by trained personnel. Seek medical attention immediately.

INGESTION: If swallowed, do NOT induce vomiting. Call a physician or a poison control center immediately. Never give anything by mouth to an unconscious person.

Spills

Contain and collect in an appropriate container. Uncured material may be removed with water.

Disposal

Dispose of in accordance with local, state or federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty. Refer to Decoplast Specifications for more complete information on proper use and handling of this product.

Decoplast Fiberglass Reinforcing Mesh

Detail Mesh (4.5 oz) / Standard Mesh (4.5 oz)

High Standard Mesh (6.0 oz) / Intermediate Mesh (10.0 oz)

Decoplast Armor 15 Mesh (14.0 oz) / Decoplast Armor 20 Mesh (20.0 oz)

Decoplast Corner Mesh (6.0 oz)



Decoplast Reinforcing Meshes are specially designed coated glass fiber fabrics used as base coat reinforcement and for impact resistance wall applications.

TECHNICAL DATA

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULTS	
Tensile Strength	ASTM D-5035	Product	WARP (PLI)	WEFT (PLI)
		Detail Mesh	150	160
		Standard Mesh	150	160
		High Standard Mesh	140	225
		Intermediate Mesh	300	460
		Armor 15	350	540
		Armor 20	875	500
		Corner Mesh	140	225

Product	Nominal Weight (YD ² . +/- 5 %)	Width of Roll	Length of Roll
Detail Mesh	4.5 oz	9.5" (0.24 m)	150' (45.7 m)
Standard Mesh	4.5 oz	38" (0.97 m)	150' (45.7 m)
High Standard	6.0 oz	38" (0.97 m)	150' (45.7 m)
Intermediate	10.0 oz	38" (0.97 m)	75' (22.9 m)
Armor 15	14.0 oz	38" (0.97 m)	75' (22.9 m)
Armor 20	20.0 oz	39" (0.97 m)	75' (22.9 m)
Corner Mesh	6.0 oz	9.5" (0.24 m)	150' (45.7 m)

Coverage Per Roll

Decoplast Detail Mesh: 118 ft² (11 m²)

Standard Mesh: 475 ft² (44.1 m²)

High Standard: 475 ft² (44.1 m²)

Intermediate Mesh: 237 ft² (22.1 m²)

Armor 15: 237 ft² (22.1 m²)

Armor 20: 237 ft² (22.1 m²)

Decoplast Corner Mesh: 118 ft² (11 m²)

Packaging Per Carton

Decoplast Detail Mesh: 16 Rolls / Box

Standard Mesh: 4 Rolls / Box

High Standard: 4 Rolls / Box

Intermediate Mesh: 4 Rolls / Box

Armor 15: 2 Rolls / Box

Armor 20: 1 Rolls / Box

Decoplast Corner Mesh: 4 Rolls / Box

FEATURES

BENEFITS

Flexible

Easily wrapped at corners; provides crack resistance

Trimmed Edges

Minimizes building on overlapped seams

Coated Glass Fiber

Durable, long-lasting; provides impact resistance

Variety of Weights

Meets a variety of requirements

USE

Decoplast Intermediate Mesh: for use as a reinforcing fabric in wall claddings. Achieves high-impact resistance.

Decoplast Detail Mesh: lightweight, highly flexible reinforcing fabric specially designed for use to facilitate back-wrapping system terminations, into reveals and for intricate architectural details in wall claddings, and to bridge sheathing joints and wrap rough openings applications.

Decoplast Mesh / High Standard: for use as standard reinforcing fabric in wall claddings, and in Autoclaved Aerated Concrete (AAC) wall applications. Achieves standard impact resistance.

Shelf Life

24 months, if unopened, properly stored and protected from moisture.

Storage

Store off the ground in a dry area. Protect from extreme heat [90°F (32°C)], moisture and direct sunlight.

Decoplast Fiberglass Reinforcing Mesh

Detail Mesh (4.5 oz) / Standard Mesh (4.5 oz)

High Standard Mesh (6.0 oz) / Intermediate Mesh (10.0 oz)

Decoplast Armor 15 Mesh (14.0 oz) / Decoplast Armor 20 Mesh (20.0 oz)

Decoplast Corner Mesh (6.0 oz)

USE CONTINUED

Decoplast Armor 15: for use at ground floors and other areas of anticipated impact in wall claddings. Achieves ultra-high impact resistance when used beneath Decoplast Mesh.

Decoplast Armor 20: Decoplast's heaviest reinforcing fabric, for use at ground floors and other areas of anticipated impact in wall claddings. Exceeds ultra-high impact resistance when used beneath Decoplast Mesh.

SURFACE PREPARATION

Inspect the insulation board surface for planeness, damage or deterioration due to weather or abuse, and repair prior to application of reinforcing mesh. Rasp the insulation board surface.

APPLICATION

Decoplast Intermediate Mesh / Decoplast Mesh / High Standard Mesh:

Apply a layer of base coat over previously rasped insulation board (or, over cement board stucco systems, or, over prepared AAC wall applications). Work horizontally or vertically in full width strips and fully embed mesh into wet base coat by troweling from center to the edges of the mesh. Avoid wrinkles in the mesh and smooth the base coat to eliminate trowel marks. Double wrap mesh at all corners and overlap not less than 2½" (64 mm) at mesh joints.

Decoplast Detail Mesh: Refer to appropriate Decoplast wall claddings specifications.

Decoplast Armor 15 / Armor 20: Apply a layer of Decoplast base coat over previously rasped insulation board. Work horizontally or vertically in full width strips and immediately embed Armor Mesh into the wet base coat. Butt Decoplast Armor Mesh tightly at seams. Apply Decoplast Mesh with appropriate base coat over the Armor Mesh application when dry.

LIMITATIONS

Decoplast Reinforcing Meshes should only be used in accordance with appropriate Decoplast Insulated Wall Cladding Specification or other published recommendations.



HEALTH AND SAFETY

Health Precaution

Contains fiberglass. As with any chemical construction product, exercise care when handling.

Safety Precaution

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

First Aid:

EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Contact a physician.

Disposal

Dispose of in accordance with local, state or federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty. Refer to Decoplast Specifications for more complete information on proper use and handling of this product.



Decoplast Primer

64 Standard Colors / Custom Colors

TECHNICAL DATA

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULTS
Surface Burning	ASTM E-84	< 25 Flame Spread	Pass
		< 450 Smoke Developed	Pass

Decoplast Primer is used for priming prepared concrete, masonry, plaster, EIFS base coat, or drywall surfaces prior to application of Decoplast Finishes and Coatings.

Coverage

800-1000 ft² (74.3-92.9 m²) per pail applied at 4 to 6 wet mils per coat

FEATURES

BENEFITS

Acrylic Based	Excellent adhesion; finish coat adhesion improvement
Tinted for Finish	Color uniformity improvement
Substrate Absorption	Improves coverage, water-resistance, and reduces possible efflorescence
Non Vapor Barrier	Allows substrate to breathe naturally
Water-Based	Safe, non-toxic; cleans up with water
Low VOC	Safe for workers and the environment

Packaging

5 gal pail (19L) 47.5 lbs / 21.6 kg per pail

Shelf Life

24 months, if properly sealed and stored.

Storage

Store off the ground in a cool/dry area. Protect from extreme heat [90°F (32°C)], moisture and direct sunlight.

SURFACE PREPARATION

Surfaces must be clean, dry, and free of frost, damage, releasing agents, including dirt, efflorescence, form oil and other foreign matter. Loose or damaged material must be removed by water blasting, sandblasting or mechanical wire brushing and repaired. Avoid application over irregular surfaces. Resurface, patch or level surfaces to required tolerance and smoothness with appropriate Decoplast leveling materials.

Pressure washing is a recommended means of surface preparation. Follow necessary safety precautions and adjust pressure to avoid damage to the underlying substrate or substrate condition. For mold, algae, and mildew removal, treat surfaces with a commercial mildew removal and/or wash product carefully following manufacturer's application and safety directions.



Decoplast Primer

64 Standard Colors / Custom Colors

MIXING

Mix with a clean, rust-free electric drill and paddle to a uniform consistency. Close container when not in use. Clean tools with water immediately after use.

APPLICATION

Apply only to sound and clean, dry, properly prepared surfaces.

Airless Spraying:

Use airless sprayer with minimum 19 mil tip. Use a starting pressure of 1900 psi and adjust as necessary.

As a primer:

Apply at 4-6 wet mils per coat. Multiple coats may be required, depending on surface condition.

Curing/Drying Time

Times assume 70° F (21° C) and 50% relative humidity. Drying time varies with temperature/humidity and surface conditions. Protect installed product from rain, freezing, and continuous high humidity until completely dry.

Clean Up

Clean all tools and equipment immediately with water. Cured material may be removed by mechanical means.

LIMITATIONS

- Use Decoplast Primer only when surface and ambient temperatures are above 40°F (4°C) and below 100°F (38°C) during application and drying period.
- Store Decoplast materials in a cool, dry place.
- Sloped surfaces: Refer to Decoplast details.
- Decoplast Primer should not be used on horizontal surfaces unless protected with appropriate Decoplast Finish materials.
- Do not apply Decoplast Primer to frozen surfaces.

HEALTH AND SAFETY

Health Precaution

Decoplast Primer is water-based. As with any chemical construction product, exercise care when handling.

WARNING!

Causes eye and skin irritation.

Safety Precaution

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

First Aid:

EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eye lids with fingers. Get immediate medical attention.

SKIN CONTACT: Immediately wash skin with plenty of soap and water for at least 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

INHALATION: If inhaled, remove to fresh air. If not breathing give artificial respiration or give oxygen by trained personnel. Seek medical attention immediately.

INGESTION: If swallowed, do NOT induce vomiting. Call a physician or a poison control center immediately. Never give anything by mouth to an unconscious person.

Spills

Contain and clean with appropriate absorbent materials.

Disposal

Dispose of in accordance with local, state or federal regulations.

Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty. Refer to Decoplast Specifications for more complete information on proper use and handling of this product.



Decoplast Exterior Textured Finishes

Ispica (Freestyle) /Genova (Fine Sand) / San Remo (Coarse Sand)

Trieste (Medium Sand) / Taormina (Fine Swirl) /Graffiato (Medium Swirl)

TECHNICAL DATA

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULTS
Surface Burning	ASTM E-84	< 25 Flame Spread < 450 Smoke Developed	Pass Pass
Flexibility	ASTM D-522	4" mandrel bend	Pass
Water Vapor Transmission	ASTM E-96	28 days	Pass
Accelerated Weathering	ASTM G-154	2000 hours	Pass; No deleterious effects
Freeze-thaw Resistance	ASTM 2485	60 cycles	No deleterious effects; 90 cycles
Mildew Resistance	ASTM D-3273	No growth @ 28 days	Pass
Salt Spray Resistance	ASTM B-117	300 hours	Pass; No deleterious effects
Water Resistance	ASTM D-2247	14 days	Pass; No deleterious effects
Abrasion Resistance	ASTM D-968	528 qts. sand	No cracking, checking or Loss of film integrity @ 528 qts.
Adhesion	ASTM C-297	28 days	> 90 to concrete
Fire Resistance	ASTM E-119	No effect on fire resistance rating of Existing rated assembly	Pass; Classified UL

Decoplast Exterior Textured Finishes are a ready-mixed, 100% acrylic based exterior textured coating used as a decorative wall finish over all approved basecoats, prepared concrete, masonry and plaster substrates.

Coverage

Decoplast Limestone (Ispica): Varies with technique.

Decoplast Fine Sand Finish (Genova): 130-145 ft² (12.1-13.5 m²) per pail.

Decoplast Medium Sand Finish (Trieste): 115- 130 ft² (10.7-12.1 m²) per pail.

Decoplast Coarse Sand Finish (San Remo): 85- 100 ft² (7.9-9.3 m²) per pail.

Decoplast Fine Swirl Finish (Taormina): 125-140 ft² (11.6-13 m²) per pail.

Decoplast Medium Swirl Finish (Graffiato): 130-145 ft² (12.1-13.5m²) per pail.

*Coverages may vary depending on application technique and surface conditions

Packaging

5 gal pail (19L) 68.5 lbs / 31 kg per pail

Shelf Life

24 months, if properly sealed and stored.

Storage

Store off the ground in a cool/dry area. Protect from extreme heat [90°F (32°C)], moisture and direct sunlight.

FEATURES

BENEFITS

Integral Color	Reduced recoating and maintenance; Unlimited Color Options
Weather Resistant	Repulsion of water and resistance of wind-driven rain
Breathable	Resists blistering, peeling and flaking; breathes naturally



Decoplast Exterior Textured Finishes

Ispica (Freestyle) / Genova (Fine Sand) / San Remo (Coarse Sand)

Trieste (Medium Sand) / Taormina (Fine Swirl) / Graffiato (Medium Swirl)

SURFACE PREPARATION

Concrete and masonry surfaces: Surfaces must be clean, dry, and free of frost, damage, releasing agents, including dirt, efflorescence, form oil and other foreign matter. Loose or damaged material must be removed by water blasting, sandblasting or mechanical wire brushing and repaired. Avoid application over irregular surfaces. Resurface, patch or level surfaces to required tolerance and smoothness with appropriate Decoplast leveling materials.

Exterior Insulation and Finish

Decoplast Systems (EIFS): Surface must be free of all releasing agents.

Gypsum wallboard surfaces: Wallboard must be taped and fasteners spotted with joint compound. Surface must be free of dust, dirt and releasing agents. Prime with appropriate Decoplast Primer.

Decoplast recommends priming cementitious substrates using Decoplast primer prior to application of finish.

MIXING

Mix with a clean, rust-free electric drill and paddle to a uniform consistency. A small amount of clean water may be added to aid workability. Limit addition of water to amount needed to achieve the finish texture. Additives are not permitted. Close container when not in use. Clean tools with water immediately after use.

APPLICATION

Apply only to sound and clean, dry, properly prepared surfaces.

Trowel: Apply Decoplast Textured Finish with a clean stainless steel trowel to a rough thickness slightly more than the largest aggregate size. Apply the finish keeping thickness uniform. Maintain a wet edge on Decoplast Textured Finish by applying and texturing continually over the wall surface. Work Decoplast Textured Finish to corners, joints or other natural breaks. Do not allow material to set up within an uninterrupted wall area. Achieve final texture by floating with the appropriate trowel.

Note: Decoplast Ispica (Freestyle) Finish requires two coats.



Decoplast Exterior Textured Finishes

Ispica (Freestyle) / Genova (Fine Sand) / San Remo (Coarse Sand)

Trieste (Medium Sand) / Taormina (Fine Swirl) / Graffiato (Medium Swirl)

APPLICATION Continued

Spray: Decoplast Textured Finishes can be applied with a gravity-feed sprayer, texture spray pump machine, or other appropriate equipment. To ensure full coverage of the surface, apply in an even coat.

IMPORTANT: ALWAYS check color for proper match.

Apply coating continuously, maintain a wet edge to eliminate cold joints. Work Decoplast Textured Finish to corners, joints or other natural breaks. Avoid application in direct sunlight. Protect installed product from rain, freezing, and continuous high humidity until completely dry.

Curing/Drying

Decoplast Textured Finishes dry within 24 –72 hours under normal conditions [70°F (21°C), 50% RH]. Drying time varies with temperature, humidity and surface conditions.

Clean Up

Clean tools and equipment with water immediately after use. Remove dried material from tools and equipment mechanically.

LIMITATIONS

Use Decoplast Textured Finishes only when surface and ambient temperatures are above 40°F (4°C) and below 100°F (38°C) during application and drying period.

Store Decoplast materials in a cool, dry place.

Sloped surfaces: Refer to Decoplast details.

Decoplast Textured Finishes should not be used on weather-exposed horizontal or below grade surfaces or where immersion in water may occur.

Do not apply Decoplast Textured Finish to frozen surfaces.

HEALTH AND SAFETY

Health Precaution

Decoplast Textured Finishes are water-based. As with any chemical construction product, exercise care when handling.

WARNING!

Causes eye and skin irritation.

Safety Precaution

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

First Aid:

EYE CONTACT: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eye lids with fingers. Get immediate medical attention.

SKIN CONTACT: Immediately wash skin with plenty of soap and water for at least 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

INHALATION: If inhaled, remove to fresh air. If not breathing give artificial respiration or give oxygen by trained personnel. Seek medical attention immediately.

INGESTION: If swallowed, do NOT induce vomiting. Call a physician or a poison control center immediately. Never give anything by mouth to an unconscious person.

Spills

Contain and clean with appropriate absorbent materials.

Disposal

Dispose of in accordance with local, state or federal regulations.


Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) for further health and safety information.

LIMITED WARRANTY

This product is subject to a written limited warranty. Refer to Decoplast Specifications for more complete information on proper use and handling of this product.

decoplast® The Finest Finishes

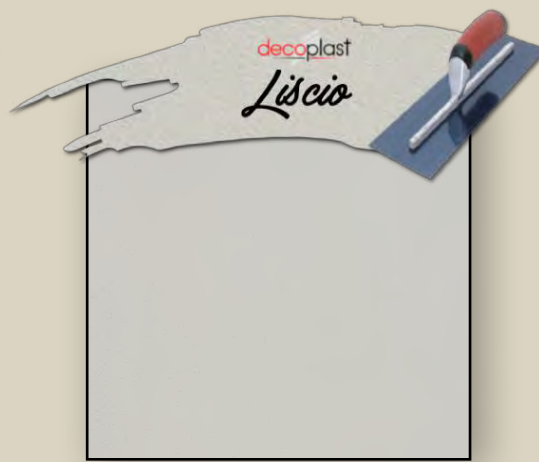

Consistency & Difference

Our engineers have meticulously designed and constantly enhance the most hi tech formulas in the industry. With great hang times, superb consistency and superior adhesion, our materials are some of the best around. Once you try them, you will see the DECO difference.





Your Source for Exterior Insulation & Finish Systems

STANDARD COLORS



			
2011 Jersey Cream	2012 Practical Beige	2013 Latte	2014 Hopsack
			
2015 Ivoire	2016 Whole Wheat	2017 Bagel	2018 Camelback
			
2019 Antique White	2020 Believable Buff	2021 Sand Dollar	2022 Nomadic Desert
			
2023 Navajo White	2024 Softer Tan	2025 Cherish Cream	2026 Sand Trap
			
2027 Nearly Peach	2028 Sweet Orange	2029 Warming Peach	2030 Interface Tan
			
2031 Unfussy Beige	2032 Likeable Sand	2033 Soft Apricot	2034 Baked Clay
			
2035 Hush White	2036 Spun Sugar	2037 Constant Coral	2038 Moroccan Brown
			
2039 White Dogwood	2040 Fading Rose	2041 Pressed Flower	2042 Arresting Auburn

			
2043 Pacer White	2044 Kiln Beige	2045 Macadamia	2046 Dapper Tan
			
2047 Popular Grey	2048 Lightweight Beige	2049 Totally Tan	2050 Deep Tan
			
2051 Torque White	2052 Agreeable Grey	2053 Bonafide Beige	2054 Balanced Beige
			
2055 Shoji White	2056 Accessible Beige	2057 Mindful Grey	2058 Intellectual Grey
			
2059 Macintosh	2060 Sagey	2061 Greening	2062 Surf Green
			
2063 Window Pane	2064 Passive	2065 Dorian Grey	2066 Grey Matters
			
2067 Respite	2068 Anew Grey	2069 Unusual Grey	2070 Cityscape
			
2071 Early Dawn	2072 Network Grey	2073 Software	2074 Bright White

CUSTOM COLORS AVAILABLE

These standard finish colors are representative of the unlimited color choices available. The actual project's color and texture selection should be made from a sample prepared by a Decoplast certified applicator.

The intent of these color chips is to provide a basic representation of Decoplast finish colors. This color chart is offered only as a sales aid to show a range of color variations. These color chips shall not be used for final color selection as color differences may occur between the sample material used and the finished product. **Actual color selection should be made from a LARGER SAMPLE of each finish texture and color to be used on the project.** Samples should be prepared by a trained certified applicator/contractor using the same tools and techniques proposed for the actual installation.



Warranty No: SAMPLE

10 - YEAR LIMITED MATERIALS WARRANTY

Disclaimers and Limitations of Remedies



Greenmaker Industries warrants to the below Owner that for the 10-year Warranty Period stated above and subject to the exceptions listed below, the DDARS CHanneled ADHESIVE (the “system”) described above, as properly applied by the Registered Applicator, will maintain its bond, be water resistant and will not peel, flake or chip. For any valid claim presented under this Warranty, Greenmaker Industries will supply Owner with replacement materials and labor required to Repair any non-conforming portions of the installed System. Any replacement materials provided hereunder will also be subjected to all the provisions of the Warranty during the Warranty Period shown above.

WARRANTIES DISCLAIMED – THE WARRANTY STATED IN THE PARAGRAPH ABOVE IS IN PLACE OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. GREENMAKER INDUSTRIES EXPRESSLY DISCLAIMS ANY OTHER WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. ALTHOUGH GREENMAKER INDUSTRIES MAY HAVE SUGGESTED THE MATERIAL OR DEVELOPED THE MATERIAL AT THE REQUEST OF THE GC, OWNER OR OWNERS REP, IT IS THE RESPONSIBILITY OF THE MANUFACTURER TO TEST AND DETERMINE THE SUITABILITY OF THE MATERIAL FOR THE INTENDED USE AND PURPOSE, AND THE APPLICATOR ASSUMES ALL RISK AND LIABILITY WHATSOEVER REGARDING SUCH SUITABILITY IF NOT INSTALLED AS PER MANUFACTURER SPECIFICATIONS.

LIMITATIONS OF REMEDIES AND DAMAGES – THE REPLACEMENT/REFUND REMEDY STATED IN THIS WARRANTY TAKES THE PLACE OF ALL OTHER REMEDIES AGAINST GREENMAKER INDUSTRIES AND IS THE ONLY REMEDY AGAINST DECOPLAST SYSTEMS, INC. AVAILABLE TO OWNER OR TO ANY OTHER PARTY, IN NO EVENT WILL GREENMAKER INDUSTRIES BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS) ARISING OUT OF OR CONNECTED TO THE MATERIALS OR THE SYSTEM, OR TO ANY USE OR MISUSE OF THE MATERIALS OR THE SYSTEM, REGARDLESS OF ANY STRICT LIABILITY OR ACTIVE OR PASSIVE NEGLIGENCE OF GREENMAKER INDUSTRIES AND REGARDLESS OF THE LEGAL THEORY (CONTRACT, TORT OR OTHER) USED TO MAKE A CLAIM, IN NO EVENT WILL GREENMAKER INDUSTRIES BE OBLIGATED TO PAY DAMAGES IN ANY AMOUNT EXCEEDING THE ORIGINAL PRICE OF THE MATERIALS SHOWN TO BE DEFECTIVE.

For customer relations purposes, Greenmaker industries may in its sole discretion choose to make some efforts beyond its legal obligations. Such additional efforts will not in any way change the limitations of remedies and damages stated in this paragraph or extend or change this Warranty.

Exclusions: The warranty described above does not cover, and Greenmaker Industries will have no liability for any damage or failure of the System caused by or due to any of the following:





1. Lightning, earthquake, windstorm, hurricane, tornado, hail, fire, flood or other unusual phenomena of the elements or acts of nature.
2. Settlement, movement, deflection, warpage, distortion, displacement or any other failure of the substrate. Such failures are the sole responsibility of the substrate manufacturer.
3. Cracks, breaks or openings in the substrate to which the System is applied.
4. Surface alterations, additions, object placed, or installations made on the finished surface.
5. Use of the finished surface as something other than an exterior wall (such as a recreational area or walking surface).
6. Penetration, vandalism, damage, or attack by third parties and foreign objects or agents, including but not limited to chemicals, animals and plant life.
7. Discoloration or change in visual appearance due to accumulation or streaking of dirt or other airborne materials deposited on the surface from the atmosphere.
8. Sealant failure or water penetration due to leaks through windows, air conditioning units, holes, louvers, vents, or other non-System elements made part of a System installation.
9. Other (explain):

Furthermore, the warranty described above does not cover, and Greenmaker Industries will have no liability for, any repairs to the System or repaired portions of the System, except as set forth in the sections covering Repairs and Emergency Repairs, below.

Warranty Claims: Owner shall notify Greenmaker Industries immediately of any alleged defect in the materials covered by this Warranty. Owner will provide Greenmaker Industries with a reasonable opportunity to review and investigate the alleged defect. For any valid claim presented under the Warranty, Greenmaker Industries will provide the Owner with a remedy as described above. For any claim that is not valid, Owner will pay Greenmaker Industries reasonable charges, including travel and labor, associated with investigation of such claim.

Repairs: Any portions of the System either repaired by Greenmaker Industries or repaired by Applicator and approved in writing by Greenmaker industries will be subject to the terms of this Warranty for the remainder of the Warranty Period.

Emergency Repairs: If immediate and material damage to the building and its contents is imminent due to an alleged failure of the System, the Owner may, at its own expense, make such temporary repairs as may reasonable be required to prevent such damage. If Greenmaker Industries thereafter determines that the temporary repairs were necessitated by a failure of the System, Greenmaker Industries will provide a remedy as described above. If Greenmaker Industries determines that such emergency repairs were made in accordance with Greenmaker Industries standards, such repaired portions will be subject to the terms of this Warranty for the remainder of the Warranty Period. If Greenmaker Industries determines that the temporary repairs were either not necessitated by a failure of the System, or were not made in accordance with Greenmaker Industries standards, the warranty described in this Warranty will be null and void with respect to the repaired portions of the System. In no case will Greenmaker Industries be held responsible for any damages done to the System by others in performing any repairs.



Voidability: The limited warranty contained herein will become null and void upon notice by Greenmaker Industries if:

1. Owner fails to provide prompt notification of any alleged defect in the System.
2. Owner denies Greenmaker Industries a reasonable opportunity to review and investigate an alleged failure of the System; or
3. Owner fails to pay when due the full contract price for the System and any other charges owing to Greenmaker Industries under the terms of this Warranty; provided, however, that all other terms of this limited warranty, including warranty disclaimers and limitations of remedies and damages, will remain in full force and effect despite such a nullification.

Assignability: The transfer of this Warranty to a new owner may be made only if acknowledged in writing by Greenmaker Industries to the new owner. Greenmaker Industries must be notified at the time of sale to the new owner, and Greenmaker Industries must be satisfied that the intended use of the structure by the new owner will not cause detriment to the System.

Validation: This Warranty is void unless signed by authorized representatives of Greenmaker Industries

Complete Agreement: This Warranty completely replaces and supersedes any prior oral or written warranties agreements or representations relative to the System, The System material or the application of such materials. No one other than an officer or general manager of Greenmaker Industries is authorized to change this Warranty or any of its provisions.

Owner/Developer:

Project Name and Address:

Applicator:

General Contractor:

Project Size:

System Installed:

Start Date:

Completion Date:

Warranty Expiration Date:

Signature & Title:

President & COO

Date:



697 Oakwood Avenue, West Hartford, CT 06110
voice: 860.761.2830 fax: 860.761.2831
www.decoplast.com